



Data Sheet for Article: LID16586--

10112BTR/B/W BLACK COB LED 12W WW 40° 700mA 2-STEP TRIMLESS

Surface ceiling luminaire; DARK LIGHT; 02 REC SPOTS FIX LED

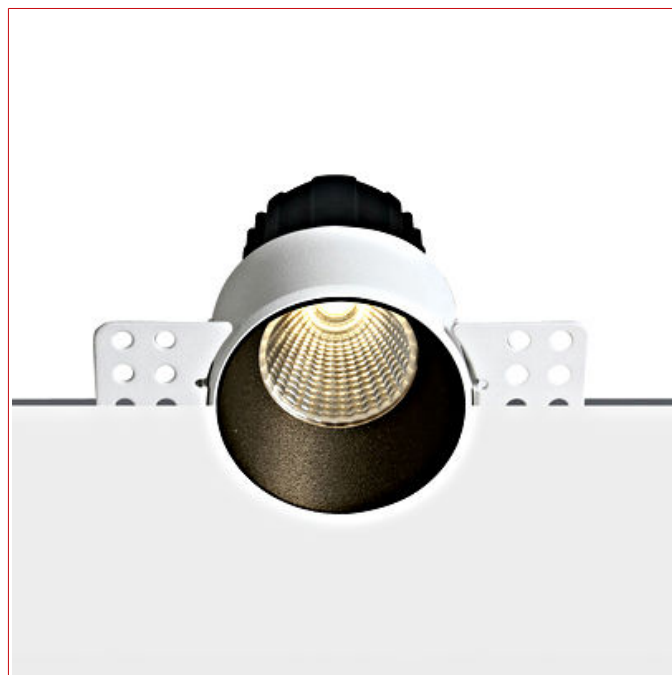

Product Details

12W COB LED 2-Step trimless Recessed spot, IP20, for general application._x000D_ _x000D_ Requires 500mA/700mA constant current driver._x000D_ Complies with standard EN60598-1 and any other specific standards.

Technical Data


Luminous flux (lm)	1100
Light colour	warm white
Colour temperature (K)	3000
Colour rendering index (Ra)	≥90
Dimmable	Depending on driver yes
Protection class	III
IP Rating	IP20
Luminaire type	Recessed ceiling luminaire
Illuminant incl.	yes
Lamp holder	LED Platine
Beam angle (°)	40
System efficiency (lm/W)	91

Technical Data - continued

Power (W)	12
Controller	Needs to be ordered separately
Operation current mA (mA)	500/700
Input current (A)	0,5/0,7
Mounting	recessed mounting ceiling
Cut-out size (mm)	Ø 70
Mounting depth (mm)	110
Colour	Black
Material	Aluminum
Height (mm)	92
Diameter (mm)	64
Optional Accessories	LID16949--
Necessary Accessories	LID13081--;
ØxH mm	64x92
Cut-out size mm	Ø 70

Dimensioned drawing: 10112BTR/B/W BLACK COB LED 12W WW 40° 700mA 2-STEP TRIMLESS

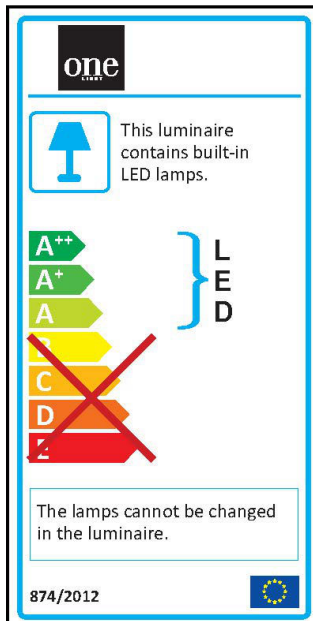

**Energieeffizienzklasse: 10112BTR/B/W BLACK COB LED 12W WW 40° 700mA
2-STEP TRIMLESS**

Article Table

DESCRIPTION	Order No.
10112BTR/B/W BLACK COB LED 12W WW 40° 700mA 2-STEP TRIMLESS Surface ceiling luminaire; DARK LIGHT; 02 REC SPOTS FIX LED	LID16586
Necessary Accessories	
89015A DRIVER 700mA 7-15W 230V 23 DRIVERS	LID13081
Optional Accessories	
050180E FAST CABLE CONNECTOR 32A 2x3-port 26 ACCES&GADGETS	LID16949