


Data Sheet for Article: LID17298--

62140BFU/W/V WHITE 15x120 30W CCTV UGR19 IP20 230V BACKLIT

complete with 800mA driver; 14 PLAFO

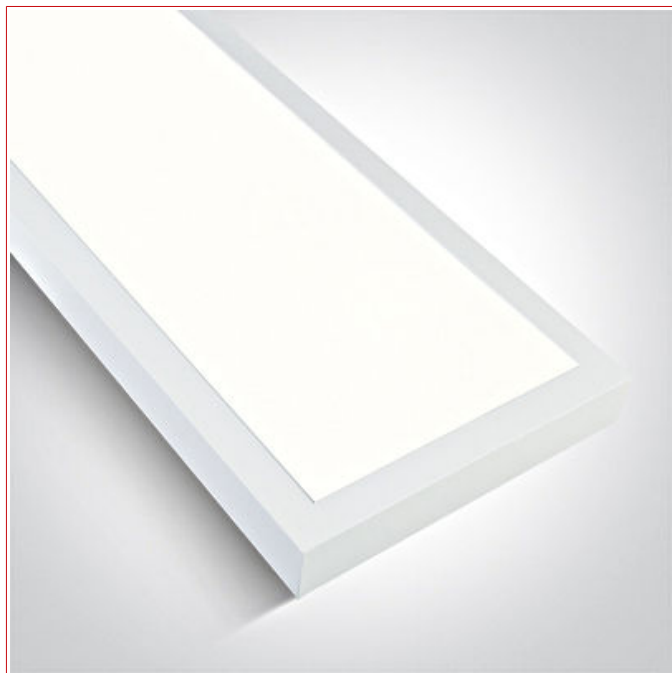

Product Details

15x120cm adjustable CCT surface mounted backlit LED panel with microprismatic diffuser. Uniform lighting, ideal for commercial applications. Complete with 800mA driver. Complies with standard EN60598-1 and any other specific standards.

Technical Data

Luminous flux (lm)	2700;3000;2850
Light colour	neutral white warm white cool white
Colour temperature (K)	4000 3000 5700
Colour rendering index (Ra)	≥80
Glare factor (UGR)	<19
Service life	50.000h
Dimmable	no
Protection class	II
IP Rating	IP20

Technical Data - continued

Illuminant incl.	yes
Lamp holder	LED Platine
System efficiency (lm/W)	90
Power Factor	0,90
Power (W)	30
Controller	LED driver
Operating voltage AC (V)	220-240
Input voltage AC (V)	220-240
Operation current mA (mA)	800
Input current (A)	0,80
Frequency (Hz)	50/60
Mounting	surface mounting ceiling
Colour	White
Material	Steel Aluminum
Lenght (mm)	1200
Width (mm)	150
Height (mm)	42
Optional Accessories	LID 16949--
LxWxH mm	1200x150x42

Article Table

DESCRIPTION	Order No.
62140BFU/W/V WHITE 15x120 30W CCTV UGR19 IP20 230V BACKLIT complete with 800mA driver; 14 PLAFO	LID17298
Optional Accessories	
050180E FAST CABLE CONNECTOR 32A 2x3-port 26 ACCES&GADGETS	LID16949