


Data Sheet for Article: LID17329--

69015B/AL/W ALUMINIUM IP67 INGROUND 3W WW 24VDC

excluding 24VDC driver; 19 WALL REC & INGRND

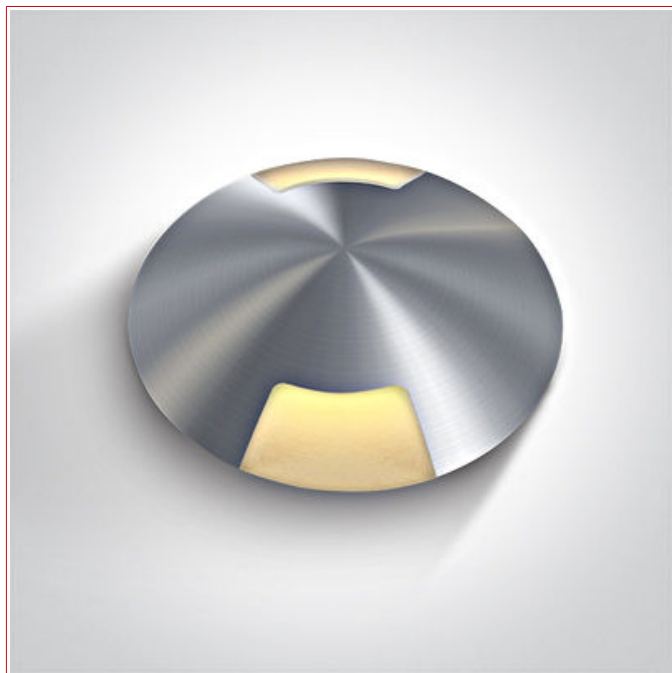

Product Details

3W LED inground, aluminium, for path illumination, IK08, IP67. Requires 24V DC driver. Complies with standard EN60598-1 and any other specific standards.

Technical Data

Luminous flux (lm)	60
Light colour	warm white
Colour temperature (K)	3000
Colour rendering index (Ra)	≥90
Protection class	III
IP Rating	IP67
Shock strength	IK08
Luminaire type	recessed floor luminaire
Illuminant incl.	yes
Lamp holder	LED Platine
System efficiency (lm/W)	20
Power (W)	3
Controller	Needs to be ordered separately

Technical Data - continued

Operating voltage DC (V)	24
Input voltage DC (V)	24
Mounting	in-ground mounted
Cut-out size (mm)	Ø 52
Mounting Depth mm (mm)	90mm+300
Colour	Aluminium
Material	Aluminum
Height (mm)	62
Diameter (mm)	56
Optional Accessories	LID16949--
ØxH mm	56x62
Cut-out size mm	Ø 52

Article Table

DESCRIPTION	Order No.
69015B/AL/W ALUMINIUM IP67 INGROUND 3W WW 24VDC excluding 24VDC driver; 19 WALL REC & INGRND	LID17329
Optional Accessories	
050180E FAST CABLE CONNECTOR 32A 2x3-port 26 ACCES&GADGETS	LID16949