

Data Sheet for Article: LID17508--

12128A/W/W WHITE 26W+2W WW IP20 60° 230V DARK LIGHT

Surface mounted downlight with beacklight, complete with driver; 13 WALL & CEIL LED



Product Details

26W Downlight + 2W Uplight COB LED Cylinder. Gun Black Reflector. Complete with non-dimmable LED driver. Complies with standard EN60598-1 and any other specific standards.


Technical Data

Net height (mm)	130,00
Net diameter (mm)	115,00
Luminaire type	wall luminaires surface mounted ceiling luminaire
Mounting	surface mounting ceiling surface mounting wall
Colour	White
Material	Aluminum
Beam angle (°)	60
Controller	LED driver
Operating voltage AC (V)	220-240
Input voltage AC (V)	220-240
Operation current mA (mA)	700

Technical Data - continued

Input current (A)	0,70
Lamp holder	LED Platine
System efficiency (lm/W)	92
Power (W)	28
Light colour	warm white
Colour temperature (K)	3000
Colour rendering index (Ra)	≥90
Luminous flux (lm)	2600
Service life	36.000h / L70 / B50
Dimmable	no
Protection class	I
IP Rating	IP20
Illuminant incl.	yes
Diameter (mm)	115
ØxH mm	115x130

Dimensioned drawing: 12128A/W/W WHITE 26W+2W WW IP20 60° 230V DARK LIGHT

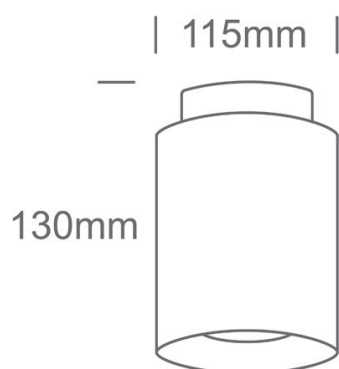

DESCRIPTION	Order No.
12128A/W/W WHITE 26W+2W WW IP20 60° 230V DARK LIGHT	LID17508
Surface mounted downlight with beeklight, complete with driver; 13 WALL & CEIL LED	