


Data Sheet for Article: LID17620--

70112/B/V BLACK CCTV 75W PV IP66 120-240V

2700K-3300-4000K, 1,5m cable, schwarz; 21 INDUSTRIAL & FLDS

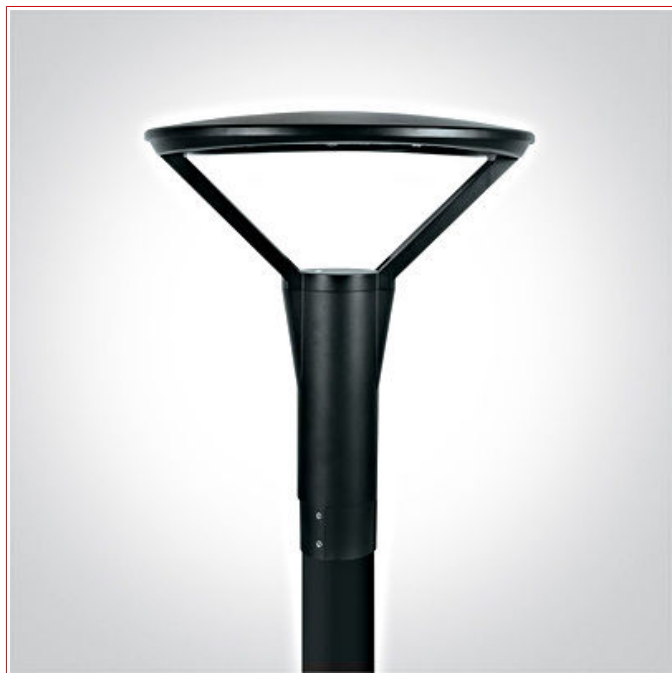

Product Details

CCT & Power Variable LED outdoor light for poles 3m and higher. Ideal for parks, parkings, playgrounds. Post Diameter 60mm. Complete with driver. Complies with standard EN60598-1 and any other specific standards.


Technical Data

Net height (mm)	530,00
Net diameter (mm)	450,00
Net weight (kg)	9,30
Colour	Black
Material	Die-cast aluminum
Controller	LED driver
Operating voltage AC (V)	120-240
Input voltage AC (V)	120-240
Lamp holder	LED Platine
System efficiency (lm/W)	110
Power (W)	25/40/60/75

Technical Data - continued

Light colour	ultra warm white warm white cool white
Colour rendering index (Ra)	≥80
Luminous flux (lm)	max. 8250
Dimmable	no
Protection class	I
IP Rating	IP66
Shock strength	IK08
Diameter (mm)	450
ØxH mm	450x530

Dimensioned drawing: 70112/B/V BLACK CCTV 75W PV IP66 120-240V

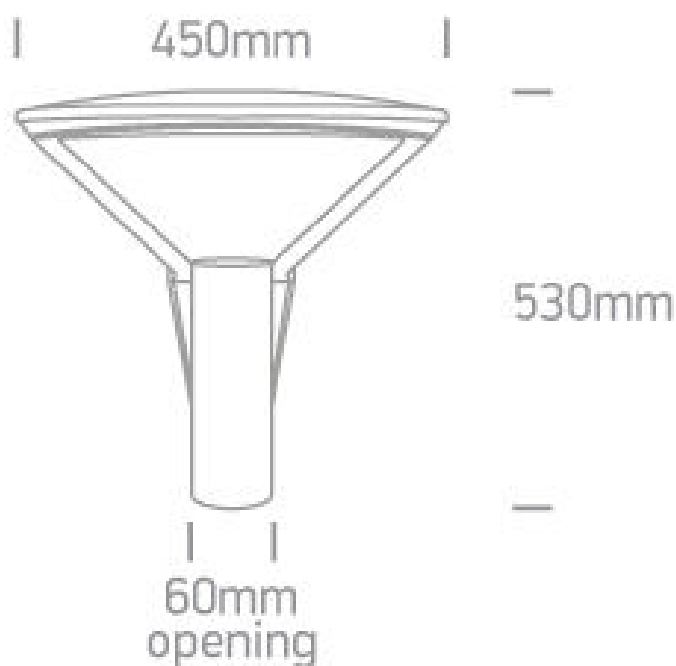

DESCRIPTION	Order No.
70112/B/V BLACK CCTV 75W PV IP66 120-240V 2700K-3300-4000K, 1,5m cable, schwarz; 21 INDUSTRIAL & FLDS	LID17620