


Data Sheet for Article: LID17671--

7843E/EW COB STRIP 24V EW 5m ROLL

10W/m 3YW IP20

Requires 24V DC driver, 3M Double face adhesive; 08 STRIPS & PROFILES

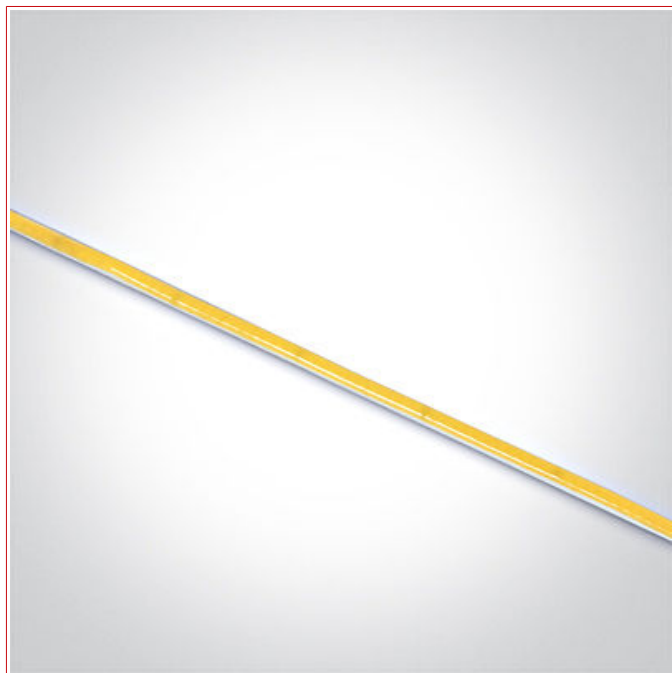

Product Details

Ultra slim flexible COB LED strip, 400LEDs/meter, 10W/meter. Supplied in 5 meters roll with 3M double face adhesive tape. Can be cut every 2cm. Requires 24V DC constant voltage LED driver. Complies with standard EN60598-1 and any other specific standards.

Technical Data

Net length (mm)	5.000,00
Net width (mm)	5,00
Net weight (kg)	0,13
Luminaire type	LED Strip
Mounting	surface mounting ceiling surface mounting wall floor mounting
Controller	Needs to be ordered separately
Lamp holder	LED Platine
System efficiency (lm/W)	79
Light colour	warm white
Colour temperature (K)	2700

Technical Data - continued

Colour rendering index (Ra)	≥90
luminous flux/m (lm/m)	790
Dimmable	yes
IP Rating	IP20
Energy efficiency class	F

Dimensioned drawing: 7843E/EW COB STRIP 24V EW 5m ROLL 10W/m 3YW IP20



DESCRIPTION	Order No.
7843E/EW COB STRIP 24V EW 5m ROLL 10W/m 3YW IP20	LID17671
Requires 24V DC driver, 3M Double face adhesive; 08 STRIPS & PROFILES	