

Data Sheet for Article: LIELA35684


SARW LED Sport

47W, 840, 6250lm, IP20, 230V, DALI, white

ballproof surface mounted luminaire, AC/DC Driver



Light distribution curve




Technical Data

Net length (mm)	1.255,00
Net width (mm)	355,00
Net height (mm)	85,00
Net weight (kg)	6,00
Min. ambient temperature (°C)	-20

Technical Data - continued

Max. ambient temperature (°C)	50
Luminaire type	surface mounted ceiling luminaire
Mounting	surface mounting ceiling
Colour	RAL 9003 (white)
Material	sheetsteel
Controller	EVG DALI
Operating voltage AC (V)	220-240
Operating voltage DC (V)	176-280
Lamp holder	LED Platine
System efficiency (lm/W)	120
Power (W)	47
Light colour	neutral white
Colour temperature (K)	4000
Colour rendering index (Ra)	≥80
Colour stability MacAdam (sdcm)	3
Luminous flux (lm)	5625
Service life	50.000h / L90 / B50
Dimmable	DALI
Protection class	I
IP Rating	IP20
Shock strength	IK10
Ball impact resistant	Yes
Illuminant incl.	yes
LxWxH mm	1255x355x85

Dimensioned drawing: SARW LED Sport 47W, 840, 6250lm, IP20, 230V, DALI, white

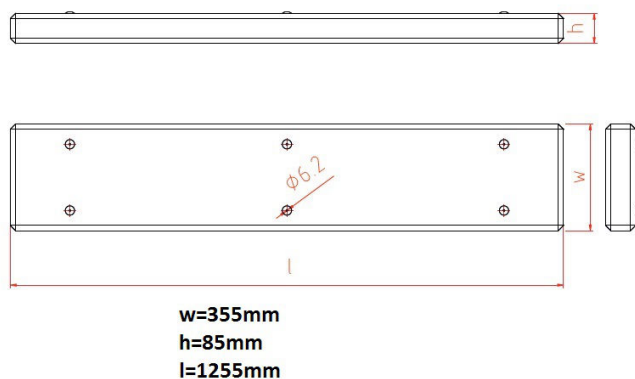

Article Table

DESCRIPTION	Order No.
SARW LED Sport 47W, 840, 6250lm, IP20, 230V, DALI, white ballproof surface mounted luminaire, AC/DC Driver	LIELA35684
Optional Accessories	
Flush-mounted Dimmer inbox for Dali Ballasts or Drivers For push button control	EHDALIDIM