


Data Sheet for Article: LIEP0463--

NOVIA LINE 50 D 16,3W 1662lm 830 OP ON/OFF white L-614

Aluminum profile luminaire with opal PMMA diffuser, direct distribution, IP20



Light distribution curve




Technical Data

Net length (mm)	614,00
Net width (mm)	50,00
Net height (mm)	81,00
Net weight (kg)	1,50
Min. ambient temperature (°C)	-20
Max. ambient temperature (°C)	40
Luminaire type	Surface-mounted luminaire
Colour	Black

Technical Data - continued

Material	Aluminum
Controller	LED driver AC / DC
Operating voltage AC (V)	220-240V 50/60Hz
Colour stability MacAdam (sdcm)	3
Lamp holder	LED Platine
Power (W)	40
Light colour	neutral white
Colour temperature (K)	4000
Colour rendering index (Ra)	≥80
Luminous flux (lm)	4318
Service life	50.000h / L80 / B10
Dimmable	no
Protection class	I
IP Rating	IP20
Illuminant incl.	yes

Dimensioned drawing: NOVIA LINE 50 D 16,3W 1662lm 830 OP ON/OFF white L-614

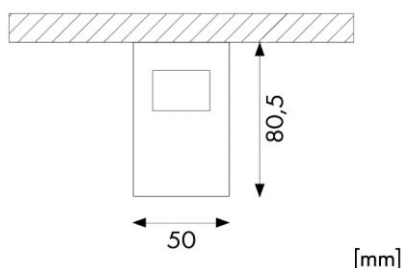

DESCRIPTION	Order No.
NOVIA LINE 50 D 16,3W 1662lm 830 OP ON/OFF white L-614	LIEP0463
Aluminum profile luminaire with opal PMMA diffuser, direct distribution, IP20	