


Data Sheet for Article: LIEP0487--


NOVIA LINE 50 EB 16,3W 1652lm 840 MP

UGR<19 DALI white L1221

Recessed luminaire made of extruded aluminium profile with microprismatic PMMA diffuser, direct light distribution, IP20

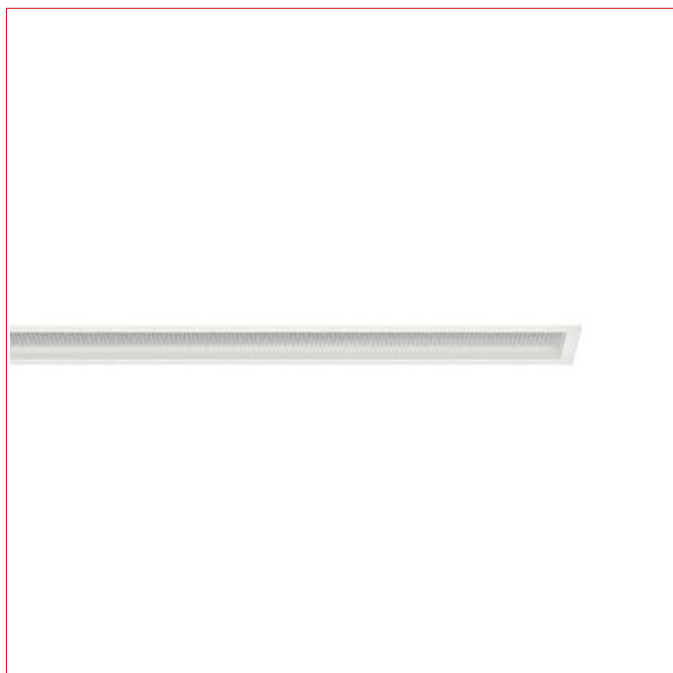

Light distribution curve




Technical Data

Net length (mm)	1.232,00
Net width (mm)	63,00
Net height (mm)	77,00
Net weight (kg)	2,90
Min. ambient temperature (°C)	-20
Max. ambient temperature (°C)	40
Cut-out size (mm)	78x1433

Technical Data - continued

Colour	White
Material	Aluminum
Operating voltage AC (V)	220-240
Lamp holder	LED Platine
System efficiency (lm/W)	138
Power (W)	16,82
Colour temperature (K)	4000
Colour rendering index (Ra)	≥80
Luminous flux (lm)	1769
Service life	>50.000h
Dimmable	no
Protection class	I
IP Rating	IP20
Illuminant incl.	yes
LxWxH mm	1232x63x77
Numbers of luminars per MCB B13	ET
Numbers of luminars per MCB B16	50

Dimensioned drawing: NOVIA LINE 50 EB 16,3W 1652lm 840 MP UGR<19 DALI white L1221

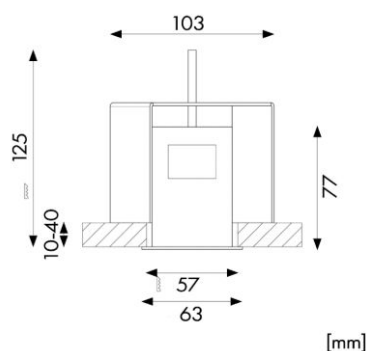

DESCRIPTION	Order No.
NOVIA LINE 50 EB 16,3W 1652lm 840 MP UGR<19 DALI white L1221 Recessed luminaire made of extruded aluminium profile with microprismatic PMMA diffuser, direct light distribution, IP20	LIEP0487