

Data Sheet for Article: LIFLD0007C

Flyer Streetl. asym. 30LED 71W 6630lm 4000K, SABLE NOIR

With integrated ECG - Power of luminaire 71W - SC.II - IP66 - Complete with 1 m Cable




Technical Data

Luminaire type	street light Mastaufsatzleuchte
Mounting	mast mounting
Colour	Sable Noir
Material	Aluminum
Controller	LED driver
Operating voltage AC (V)	230
Light source	LED
Lamp holder	LED Platine
Watt (W)	71
Light colour	neutral white
Colour temperature (K)	4000
luminous flux (lm)	6630
Number of lamps	1

Technical Data - continued

Appliance class	II
IP Rating	IP66
illuminant incl.	yes
LxWxH mm	520x310x85

Dimensioned drawing: Flyer Streetl. asym. 30LED 71W 6630lm 4000K, SABLE NOIR

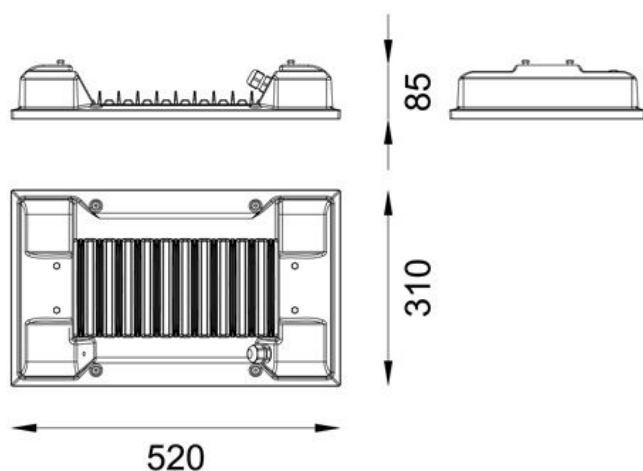

Article Table

DESCRIPTION	Order No.
Flyer Streetl. asym. 30LED 71W 6630lm 4000K, SABLE NOIR	LIFLD0007C
With integrated ECG - Power of luminaire 71W - SC.II - IP66 - Complete with 1m Cable	