

Data Sheet for Article: LIFS002001

FS 48, UWW, Ra=90+, 11, W/m, 920lm/m, 24VDC, IP44, l=5m

LED Flexstrip ultra warm white, only for indoor use




Technical Data

Power per Meter (W/m)	11,80
luminous flux/m (lm/m)	932
Light colour	ultra warm white
Colour temperature (K)	2550K +/- 60
Colour rendering index (Ra)	≥90
Dimmable	Depending on driver yes
Protection class	III
IP Rating	IP44
Luminaire type	LED Strip
Illuminant incl.	yes
Beam angle (°)	120
Operating voltage DC (V)	24
Mounting	surface mounting ceiling surface mounting wall
Length (mm)	5000
Width (mm)	10,50

Technical Data - continued

Height (mm)	2,20
Optional Accessories	LIAP006001;LIAP006003;LIAP006002;LIAP006004;LIAP006005;LIAP001003;LIAP001008;LIAP001001;LIAP001005;LIAP001002;LIAP001006;LIAP001004;LIAP001007;LIAP005003;LIAP005001;LIAP003002;LIAP003004;LIAP003003;LIAP003001;LIAP003005;LIAP003100;LIAP003200;LIAP004001;LIAP002006;LIAP002001;LIAP002003;LIAP002002;LIAP002004;LIAP002005
Necessary Accessories	LILPV6024-;LINT244100;LINT924100;LILPV10024
LxWxH mm	5000x11x2
Binning	3-SDCM

Dimensioned drawing: FS 48, UWW, Ra=90+, 11,W/m, 920lm/m, 24VDC, IP44, l=5m

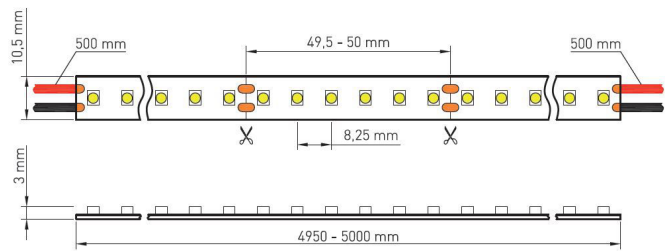

Article Table

DESCRIPTION	Order No.
FS 48, UWW, Ra=90+, 11,W/m, 920lm/m, 24VDC, IP44, l=5m LED Flexstrip ultra warm white, only for indoor use	LIFS002001
Necessary Accessories	
LED Power Supplies LPV 60W/24V, IP67	LILPV6024
LCA 100W 230V/24V/DC DALI/Switch Dim one4all TALEXdriver Tridonic, dimmable 24 V constant voltage LED driver	LINT244100
LED Power Supplies FW 100W/24V, MM, IP20	LINT924100
LED Power Supplies LPV 100W/24V, IP67	LILPV10024
Optional Accessories	
Aluminium profile CLF L-2000mm W-35mm H-15mm	LIAP006001
Aluminium profile CLI L-2000mm W-45mm H-35mm	LIAP006003
Aluminium profile CLR L-2000mm W-35mm H-35mm	LIAP006002
Aluminium profile CLU L-2000mm W-45mm H-17mm	LIAP006004
Aluminium profile CLW L-2000mm W-35mm H-90mm	LIAP006005
Aluminium profile LBE, L-2000mm W-25mm H-25mm	LIAP001003
Aluminium profile LBE L-2000mm W-19,3mm H-21,6mm	LIAP001008
Aluminium profile LBF, L-2000mm W-19mm H-8mm	LIAP001001
Aluminium profile LBI, L-2000mm W-29mm H-19mm	LIAP001005
Aluminium profile LBR, L-2000mm W-19mm H-19mm	LIAP001002
Aluminium profile LBS, L=2000mm, Ø-29,9mm	LIAP001006
Aluminium profile LBU, L-2000mm W-29mm H-8mm	LIAP001004
Aluminium profile LBV, L-2000mm W-22mm H-65mm	LIAP001007
Aluminium profile MFI L-2000mm W-55mm H-57mm	LIAP005003
Aluminium profile MFR L-2000mm W-45mm H-60mm	LIAP005001
Aluminium profile SLA, L-2000mm W-60mm H-36mm	LIAP003002
Aluminium profile SLH L-2000mm W-60mm H-80mm	LIAP003004
Aluminium profile SLI, L-2000mm W-60mm H-36mm	LIAP003003
Aluminium profile SLR, L-2000mm W-60mm H-50mm	LIAP003001
Aluminium profile SLT L-2000mm W-60mm H-70mm	LIAP003005
Aluminium profile SLW smooth L-2000mm W-58,6mm H-20,5mm	LIAP003100
Aluminium profile SLW rippled L-2000mm W-58,6mm H-20,5mm	LIAP003200
Aluminium profile SPL L-2000mm W-35,2mm H-25mm	LIAP004001
Aluminium profile TBE L-2000mm W-40mm H-14,5mm	LIAP002006
Aluminium profile TBF L-2000mm W-25mm H-12,5mm	LIAP002001
Aluminium profile TBI, L-2000mm W-25mm H-27mm	LIAP002003
Aluminium profile TBR, L-2000mm W-25mm H-25mm	LIAP002002

Article Table

DESCRIPTION	Order No.
Optional Accessories	
Aluminium profile TBU, L-2000mm W-25mm H-14,5mm	LIAP002004
Aluminium profile TBW, L-2000mm W-26,3mm H-80mm	LIAP002005