


Data Sheet for Article: LIG100030B

SEGON LED 20W ED 1900lm/840 3h M MAT IP44 UGR <19 70° white



Light distribution curve




Technical Data

Net height (mm)	110,00
Net diameter (mm)	240,00
Net weight (kg)	2,00
Min. ambient temperature (°C)	0
Max. ambient temperature (°C)	35
Cut-out size (mm)	Ø215

Technical Data - continued

Luminaire type	Recessed ceiling luminaire
Mounting	recessed mounting ceiling
Colour	White
Material	Aluminum
Cover	matt
Manufacturer	01-Schrack-Trinity
Beam angle (°)	70
Glare factor (UGR)	<19
Controller	LED driver
Operating voltage AC (V)	220-240
Lamp holder	LED Platine
System efficiency (lm/W)	95
Power (W)	20
Light colour	neutral white
Colour temperature (K)	4000
Colour rendering index (Ra)	≥80
Luminous flux (lm)	1900
Emergency light	Emergency kit 3h
Luminous flux in emergency mode (lm)	300
Service life	50.000h / L80 / B10
Dimmable	no
Protection class	I
IP Rating	IP44
Shock strength	IK07
Illuminant incl.	yes
ØxH mm	240x110
Cut-out size mm	Ø215

Dimensioned drawing: SEGON LED 20W ED 1900lm/840 3h M MAT IP44 UGR <19 70° white

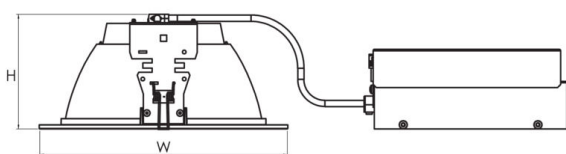

Article Table

DESCRIPTION	Order No.
SEGON LED 20W ED 1900lm/840 3h M MAT IP44 UGR <19 70° white	LIG100030B