

Data Sheet for Article: LIG15L0630


SEGON EVO LED 21W ED 2650lm/ 840 MAT

UGR<19 IK07 IP44 79°

white



Light distribution curve





Technical Data

Net height (mm)	110,00
Net diameter (mm)	240,00
Net weight (kg)	0,60
Min. ambient temperature (°C)	0
Max. ambient temperature (°C)	35

Technical Data - continued

Cut-out size (mm)	Ø 215
Luminaire type	Recessed ceiling luminaire
Mounting	recessed mounting ceiling
Colour	White RAL 9010
Material	Aluminum
Cover	matt
Beam angle (°)	79
Glare factor (UGR)	<19
Controller	LED driver
Operating voltage AC (V)	220-240
Lamp holder	LED Platine
System efficiency (lm/W)	126
Power (W)	21
Light colour	neutral white
Colour temperature (K)	4000
Colour rendering index (Ra)	≥80
Luminous flux (lm)	2650
Service life	100.000h / L80 / B10
Dimmable	no
Protection class	I
IP Rating	IP44
Shock strength	IK07
Illuminant incl.	yes
Diameter (mm)	240
ØxH mm	240x110
Cut-out size mm	Ø 215
Numbers of luminars per MCB B10	38
Numbers of luminars per MCB B16	60
Numbers of luminars per MCB B25	91

**Dimensioned drawing: SEGON EVO LED 21W ED 2650lm/840 MAT UGR<19
IK07 IP44 79°**

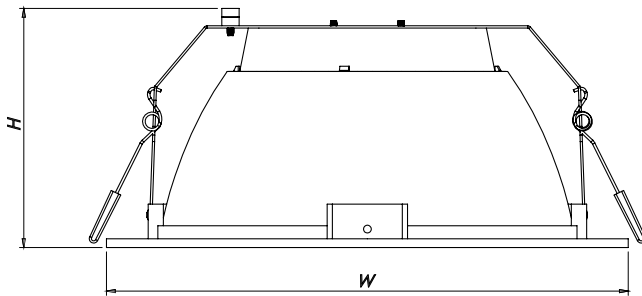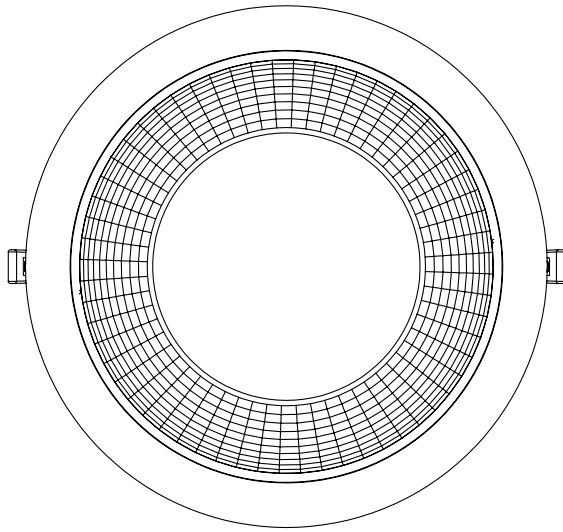

Article Table

DESCRIPTION	Order No.
SEGON EVO LED 21W ED 2650lm/840 MAT UGR<19 IK07 IP44 79° white	LIG15L0630
Optional Accessories	
89005/EME EMERGENCY KIT 3W FOR LED FITTINGS/STRIPS 5-50W 22 EMERGENCY LIGHTS	LID13670