

Data Sheet for Article: LIG3100061


SALINO 242 LED 44W 4250lm/ 830 UGR<19

IP20 70°

white, GEN.2



Light distribution curve




Technical Data

Net height (mm)	238,00
Net diameter (mm)	242,00
Net weight (kg)	1,70
Min. ambient temperature (°C)	0
Max. ambient temperature (°C)	30

Technical Data - continued

Luminaire type	surface mounted ceiling luminaire
Mounting	surface mounting ceiling
Colour	White
Material	Aluminum sheetsteel
Cover	matt
Beam angle (°)	70
Glare factor (UGR)	<19
Controller	LED driver
Operating voltage AC (V)	220-240
Lamp holder	LED Platine
System efficiency (lm/W)	90
Power (W)	44
Light colour	warm white
Colour temperature (K)	3000
Colour rendering index (Ra)	≥80
Luminous flux (lm)	4250
Service life	50.000h / L80 / B10
Dimmable	no
Protection class	I
IP Rating	IP20
Shock strength	IK07
Illuminant incl.	yes
Diameter (mm)	242
ØxH mm	242x238
Numbers of luminars per MCB B10	17
Numbers of luminars per MCB B16	28

Dimensioned drawing: SALINO 242 LED 44W 4250lm/830 UGR<19 IP20 70°

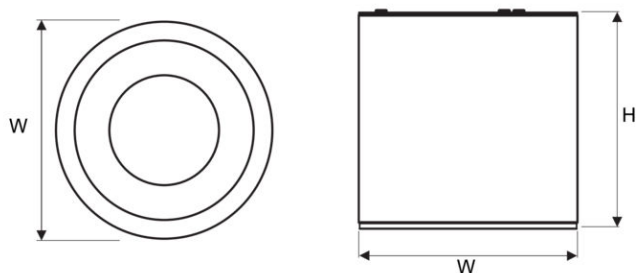

DESCRIPTION	Order No.
SALINO 242 LED 44W 4250lm/830 UGR<19 IP20 70° white, GEN.2	LIG3100061