

Data Sheet for Article: LIG3100069

SALINO 242 LED 20W DALI 1900lm/830

UGR<19 IP20 70°

white, GEN.2




Technical Data

Net height (mm)	238,00
Net diameter (mm)	242,00
Net weight (kg)	1,70
Min. ambient temperature (°C)	0
Max. ambient temperature (°C)	30
Luminaire type	surface mounted ceiling luminaire
Mounting	surface mounting ceiling
Colour	White
Material	Aluminum sheetsteel
Manufacturer	01-Schrack-Trinity
Beam angle (°)	70
Glare factor (UGR)	<19
Controller	EVG DALI

Technical Data - continued

Operating voltage AC (V)	220-240
Lamp holder	LED Platine
Watt (W)	20
System efficiency (lm/W)	95
Light colour	warm white
Colour temperature (K)	3000
Colour rendering index (Ra)	≥80
Luminous flux (lm)	1900
Service life	50.000h / L80 / B10
Dimmable	DALI
Protection class	I
IP Rating	IP20
Shock strength	IK07
Illuminant incl.	yes
ØxH mm	242x238

Dimensioned drawing: SALINO 242 LED 20W DALI 1900lm/830 UGR<19 IP20 70°

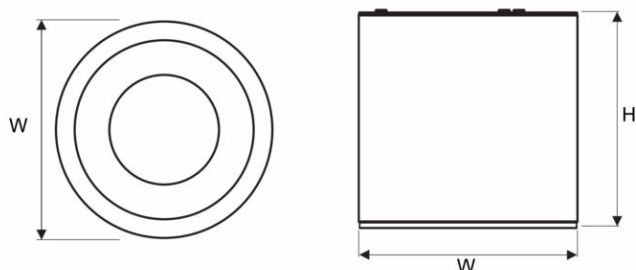

Article Table

DESCRIPTION	Order No.
SALINO 242 LED 20W DALI 1900lm/830 UGR<19 IP20 70° white, GEN.2	LIG3100069