


Data Sheet for Article: LIG3100105

SEGON W LED 170 ECO 20W 1850lm 840 ECG IP20/44 white

Recessed mounted downlight with white reflector



Light distribution curve




Technical Data

Net height (mm)	90,00
Net diameter (mm)	170,00
Net weight (kg)	0,40
Min. ambient temperature (°C)	0
Max. ambient temperature (°C)	35

Technical Data - continued

Cut-out size (mm)	Ø 155
Luminaire type	Recessed ceiling luminaire
Mounting	recessed mounting ceiling
Colour	White RAL 9010
Material	Plastic
Controller	ECG
Operating voltage AC (V)	220-240
Lamp holder	LED Platine
System efficiency (lm/W)	87,5
Power (W)	20
Light colour	neutral white
Colour temperature (K)	4000
Colour rendering index (Ra)	≥80
Luminous flux (lm)	1850
Service life	30.000h / L80 / B10
Dimmable	no
Protection class	II
IP Rating	IP20/44
Shock strength	IK06
Illuminant incl.	yes
Diameter (mm)	170
ØxH mm	170x90
Cut-out size mm	Ø 155

Dimensioned drawing: SEGON W LED 170 ECO 20W 1850lm 840 ECG IP20/44 white

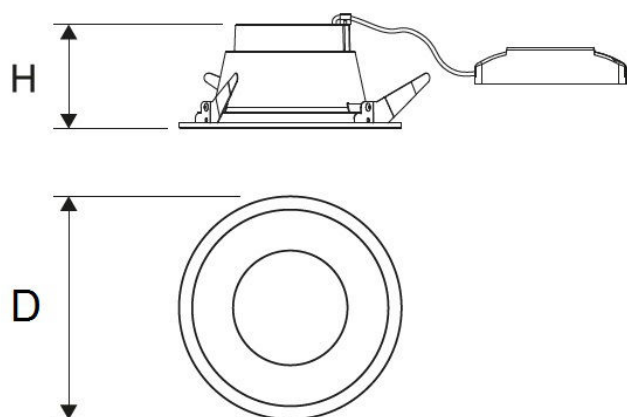

Article Table

DESCRIPTION	Order No.
SEGON W LED 170 ECO 20W 1850lm 840 ECG IP20/44 white Recessed mounted downlight with white reflector	LIG3100105
Optional Accessories	
89005/EME EMERGENCY KIT 3W FOR LED FITTINGS/STRIPS 5-50W 22 EMERGENCY LIGHTS	LID13670