

Data Sheet for Article: LIG5L01311

CLASSIC SLIM LB LED 35W 830 3900lm 230V UGR<19 MPRM white

Recessed mounted luminaire with microprism cover, IP20



Light distribution curve




Technical Data

Net length (mm)	595,00
Net width (mm)	595,00
Net height (mm)	34,00
Net weight (kg)	3,00
Max. ambient temperature (°C)	35
Colour	White
Cover	mikroprismatic
Manufacturer	02-Schrack
Glare factor (UGR)	<19
Input voltage AC (V)	230

Technical Data - continued

Watt (W)	35
System efficiency (lm/W)	111
Light colour	warm white
Colour temperature (K)	3000
Colour rendering index (Ra)	>80
Luminous flux (lm)	3900
Live time	50.000h
IP Rating	IP20
LxWxH mm	595x595x34

Dimensioned drawing: CLASSIC SLIM LB LED 35W 830 3900lm 230V UGR<19 MPRM white

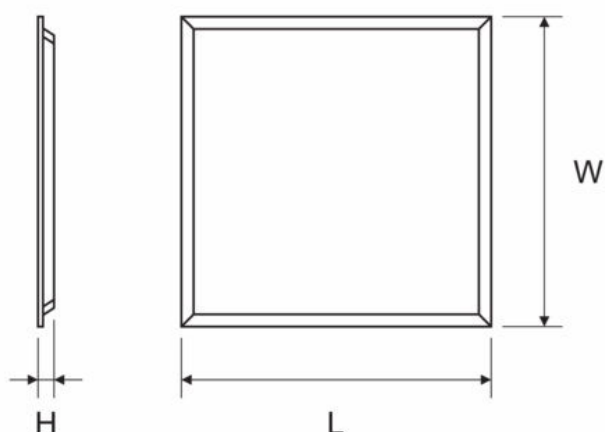

Article Table

DESCRIPTION	Order No.
CLASSIC SLIM LB LED 35W 830 3900lm 230V UGR<19 MPRM white Recessed mounted luminaire with microprism cover, IP20	LIG5L01311
Optional Accessories	
Mounting frame for plasterboard for SELENA und Lano LED M600	LIG1000605