

Data Sheet for Article: LIG5L02311

CLASSIC SLIM LB LED 35W 840 4000lm 230V UGR<19 MPRM white

Recessed mounted luminaire with microprism cover, IP20



Light distribution curve




Technical Data

Net length (mm)	595,00
Net width (mm)	595,00
Net height (mm)	34,00
Net weight (kg)	3,00
Max. ambient temperature (°C)	35
Colour	White
Cover	mikroprismatic
Manufacturer	02-Schrack
Glare factor (UGR)	<19
Input voltage AC (V)	230

Technical Data - continued

Watt (W)	35
System efficiency (lm/W)	114
Light colour	neutral white
Colour temperature (K)	4000
Colour rendering index (Ra)	>80
Luminous flux (lm)	4000
Live time	50.000h
IP Rating	IP20
LxWxH mm	595x595x34

Dimensioned drawing: CLASSIC SLIM LB LED 35W 840 4000lm 230V UGR<19 MPRM white

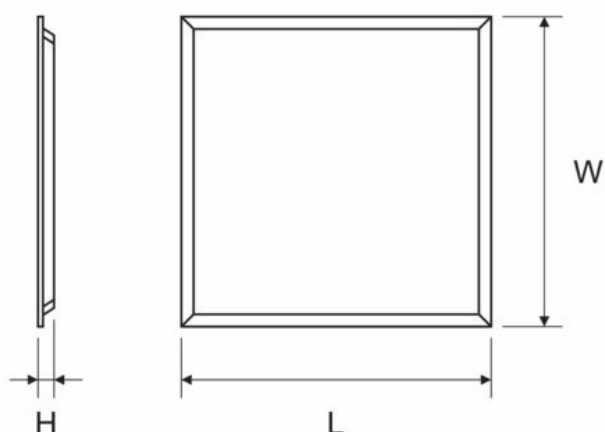

Article Table

DESCRIPTION	Order No.
CLASSIC SLIM LB LED 35W 840 4000lm 230V UGR<19 MPRM white Recessed mounted luminaire with microprism cover, IP20	LIG5L02311
Optional Accessories	
Mounting frame for plasterboard for SELENA und Lano LED M600	LIG1000605