

Data Sheet for Article: LIG5L03220


Salino LED 170 19W 1950lm 3000K IP44 IK06

white

with aluminium reflector



Light distribution curve




Technical Data

Net height (mm)	145,00
Net diameter (mm)	170,00
Net weight (kg)	0,90
Min. ambient temperature (°C)	0
Max. ambient temperature (°C)	30
Mounting	surface mounting ceiling
Colour	White

Technical Data - continued

Material	Aluminum Plexiglass sheetsteel
Lamp holder	LED Platine
Power (W)	19
Light colour	warm white
Colour temperature (K)	3000
Colour rendering index (Ra)	≥80
Luminous flux (lm)	1950
Service life	50.000h / L80 / B10
Dimmable	no
Protection class	I
IP Rating	IP44
Illuminant incl.	yes
Diameter (mm)	170
ØxH mm	170x145
Numbers of luminars per MCB B10	34
Numbers of luminars per MCB B16	56

Dimensioned drawing: Salino LED 170 19W 1950lm 3000K IP44 IK06 white

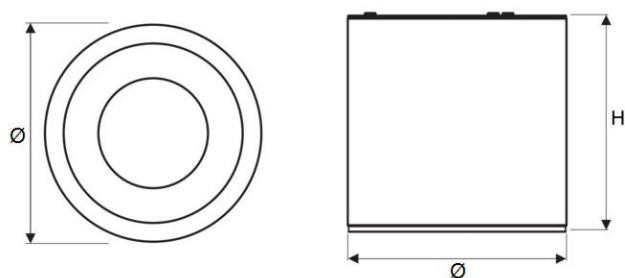

DESCRIPTION	Order No.
Salino LED 170 19W 1950lm 3000K IP44 IK06 white with aluminium reflector	LIG5L03220