




Data Sheet for Article: LIG5L05111


FORCA LED Mini 44W 5800lm 5700K IP65

25° symmetric, grey

Floodlight

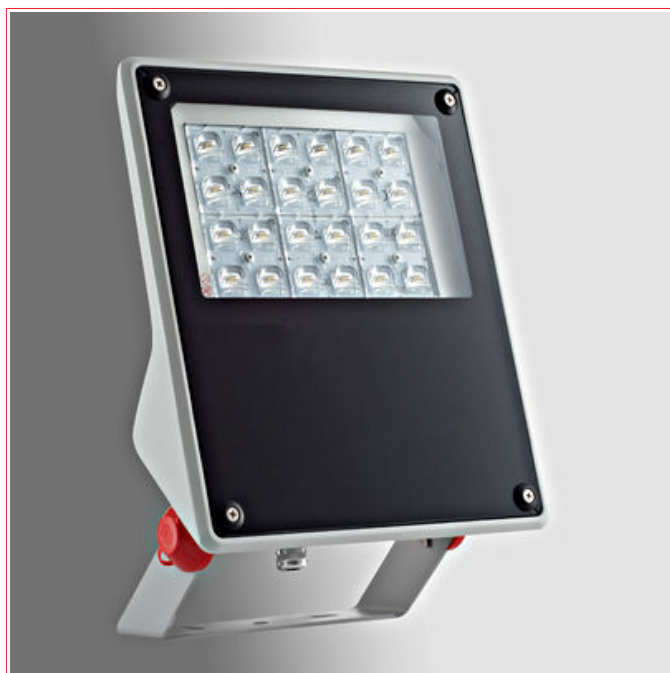

Light distribution curve




Technical Data

Net length (mm)	272,00
Net width (mm)	238,00
Net height (mm)	73,00
Net weight (kg)	3,70
Min. ambient temperature (°C)	-40

Technical Data - continued

Max. ambient temperature (°C)	40
Colour	Grey
Material	Hardened glass Die-cast aluminum
Manufacturer	01-Schrack-Trinity
Beam angle (°)	25
Controller	ECG
Operating voltage AC (V)	220-240
Light source	LED
Lamp holder	LED Platine
System efficiency (lm/W)	111
Power (W)	44
Light colour	cool white
Colour temperature (K)	5700
Colour rendering index (Ra)	≥70
Luminous flux (lm)	5800
Service life	100.000h / L80 / B10
Dimmable	no
Protection class	I
IP Rating	IP65
LxWxH mm	272x238x73

Dimensioned drawing: FORCA LED Mini 44W 5800lm 5700K IP65 25° symmetric, grey

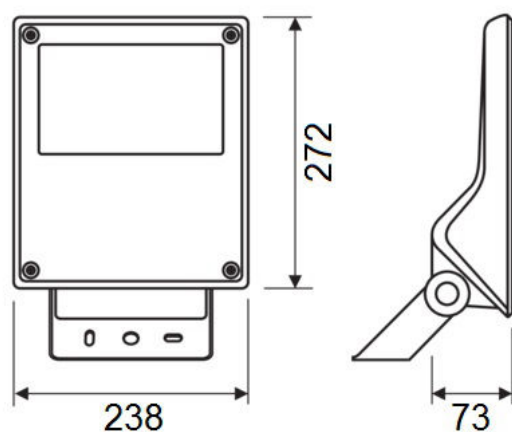

Article Table

DESCRIPTION	Order No.
FORCA LED Mini 44W 5800lm 5700K IP65 25° symmetric, grey Floodlight	LIG5L05111