



Data Sheet for Article: LIG5L05131


FORCA LED Mini 44W 5350lm 5700K IP65

asymmetric, grey

Floodlight, as narrow



Light distribution curve




Technical Data

Net length (mm)	272,00
Net width (mm)	238,00
Net height (mm)	73,00
Net weight (kg)	3,70
Min. ambient temperature (°C)	-40

Technical Data - continued

Max. ambient temperature (°C)	40
Colour	Grey
Material	Hardened glass Die-cast aluminum
Manufacturer	01-Schrack-Trinity
Controller	ECG
Operating voltage AC (V)	220-240
Light source	LED
Lamp holder	LED Platine
System efficiency (lm/W)	113
Power (W)	44
Light colour	cool white
Colour temperature (K)	5700
Colour rendering index (Ra)	≥70
Luminous flux (lm)	5350
Service life	100.000h / L80 / B10
Dimmable	no
Protection class	I
IP Rating	IP65
LxWxH mm	272x238x73

Dimensioned drawing: FORCA LED Mini 44W 5350lm 5700K IP65 asymmetric, grey

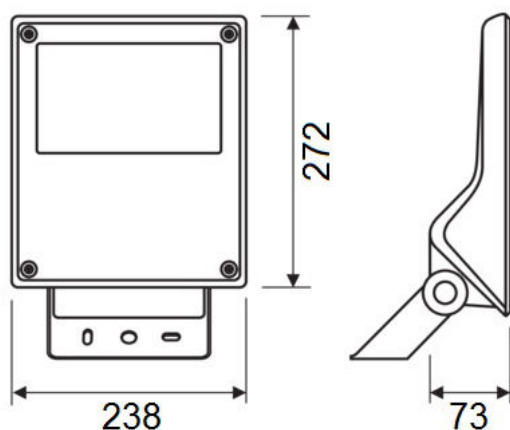

Article Table

DESCRIPTION	Order No.
FORCA LED Mini 44W 5350lm 5700K IP65 asymmetric, grey Floodlight, as narrow	LIG5L05131