

Data Sheet for Article: LIG5L25141

FORCA LED Mini 25W 2950lm 3000K IP65

asymmetric wide grey

Floodlight, as wide




Technical Data

Net length (mm)	272,00
Net width (mm)	238,00
Net height (mm)	73,00
Net weight (kg)	3,50
Min. ambient temperature (°C)	-40
Max. ambient temperature (°C)	50
Colour	Grey
Material	Hardened glass Die-cast aluminum
Controller	ECG
Operating voltage AC (V)	220-240
Lamp holder	LED Platine
System efficiency (lm/W)	118
Power (W)	25

Technical Data - continued

Light colour	warm white
Colour temperature (K)	3000
Colour rendering index (Ra)	≥70
Luminous flux (lm)	2950
Service life	100.000h / L80 / B10
Dimmable	no
Protection class	I
IP Rating	IP65
Illuminant incl.	yes
Fire protection marking	D
LxWxH mm	272x238x73
Numbers of luminars per MCB B10	12,60
Numbers of luminars per MCB B16	20

Dimensioned drawing: FORCA LED Mini 25W 2950lm 3000K IP65 asymmetric wide grey

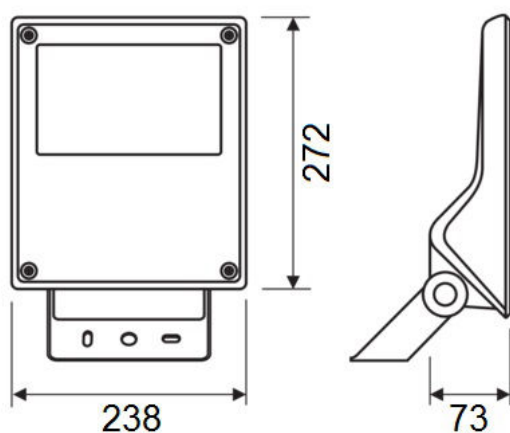

DESCRIPTION	Order No.
FORCA LED Mini 25W 2950lm 3000K IP65 asymmetric wide grey Floodlight, as wide	LIG5L25141