



Data Sheet for Article: LIG6100124

SELENA LED 29W M625 ED 3150lm/ 830 UGR<17 MAT IP20 white

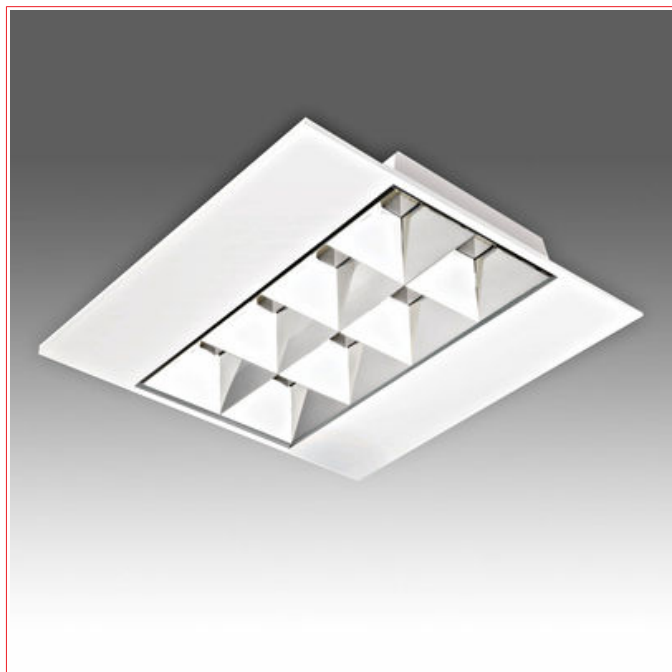

Light distribution curve




Technical Data

Net length (mm)	622,00
Net width (mm)	622,00
Net height (mm)	65,00
Net weight (kg)	2,70
Max. ambient temperature (°C)	35
Luminaire type	Recessed ceiling luminaire
Mounting	recessed mounting ceiling
Colour	RAL 9003 (white)
Material	sheetsteel
Cover	matt
Manufacturer	01-Schrack-Trinity
Glare factor (UGR)	<17

Technical Data - continued

Controller	ECG
Operating voltage AC (V)	220-240
Lamp holder	LED Platine
Watt (W)	29
System efficiency (lm/W)	109
Light colour	warm white
Colour temperature (K)	3000
Colour rendering index (Ra)	≥80
Luminous flux (lm)	3150
Service life	50.000h / L80 / B10
Dimmable	no
Protection class	I
IP Rating	IP20
Shock strength	IK04
Illuminant incl.	yes
LxWxH mm	622x622x65

Dimensioned drawing: SELENA LED 29W M625 ED 3150lm/830 UGR<17 MAT IP20 white

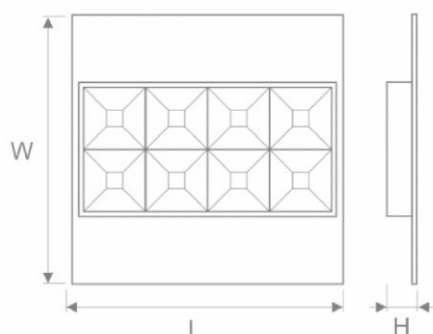

Article Table

DESCRIPTION	Order No.
SELENA LED 29W M625 ED 3150lm/830 UGR<17 MAT IP20 white	LIG6100124
Optional Accessories	
Mounting frame for plasterboard for SELENA und Lano LED M600	LIG1000605