

Data Sheet for Article: LIG6100135


SALENA LED 38W 4300lm/ 840 UGR<17 MAT

ECG IP20 white

with aluminium raster



Light distribution curve




Technical Data

Net length (mm)	600,00
Net width (mm)	325,00
Net height (mm)	65,00
Net weight (kg)	2,00
Max. ambient temperature (°C)	35
Luminaire type	surface mounted ceiling luminaire
Mounting	surface mounting ceiling
Colour	White

Technical Data - continued

Material	sheetsteel
Cover	matt
Manufacturer	01-Schrack-Trinity
Glare factor (UGR)	<17
Controller	ECG
Operating voltage AC (V)	220-240
Lamp holder	LED Platine
Watt (W)	38
System efficiency (lm/W)	113
Light colour	neutral white
Colour temperature (K)	4000
Colour rendering index (Ra)	≥80
Luminous flux (lm)	4300
Service life	50.000h / L80 / B10
Dimmable	no
Protection class	I
IP Rating	IP20
Shock strength	IK04
Illuminant incl.	yes
LxWxH mm	600x325x65

Dimensioned drawing: SALENA LED 38W 4300lm/840 UGR<17 MAT ECG IP20 white

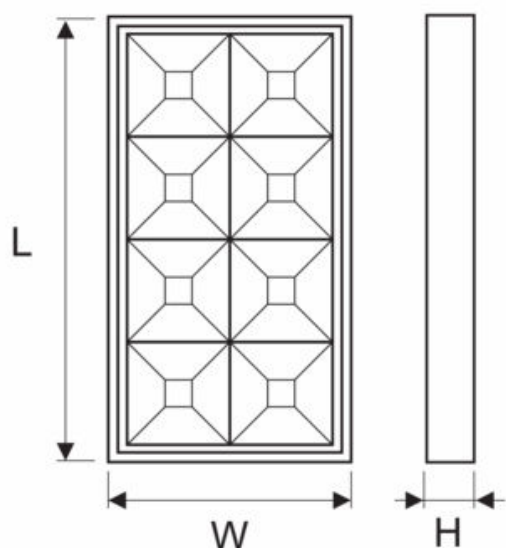

Article Table

DESCRIPTION	Order No.
SALENA LED 38W 4300lm/840 UGR<17 MAT ECG IP20 white with aluminium raster	LIG6100135