


Data Sheet for Article: LIG6100137

SALENA LED 29W 3250lm/ 840 UGR<17 ECG IP20 white



Light distribution curve




Technical Data

Net length (mm)	600,00
Net width (mm)	325,00
Net height (mm)	65,00
Net weight (kg)	2,00
Max. ambient temperature (°C)	35
Luminaire type	surface mounted ceiling luminaire
Mounting	surface mounting ceiling
Colour	White
Material	sheetsteel

Technical Data - continued

Manufacturer	01-Schrack-Trinity
Glare factor (UGR)	<17
Controller	ECG
Operating voltage AC (V)	220-240
Lamp holder	LED Platine
Watt (W)	29
System efficiency (lm/W)	112
Light colour	neutral white
Colour temperature (K)	4000
Colour rendering index (Ra)	≥80
Luminous flux (lm)	3250
Service life	50.000h / L80 / B10
Dimmable	no
Protection class	I
IP Rating	IP20
Shock strength	IK04
Illuminant incl.	yes
LxWxH mm	600x325x65

Dimensioned drawing: SALENA LED 29W 3250lm/840 UGR<17 ECG IP20 white

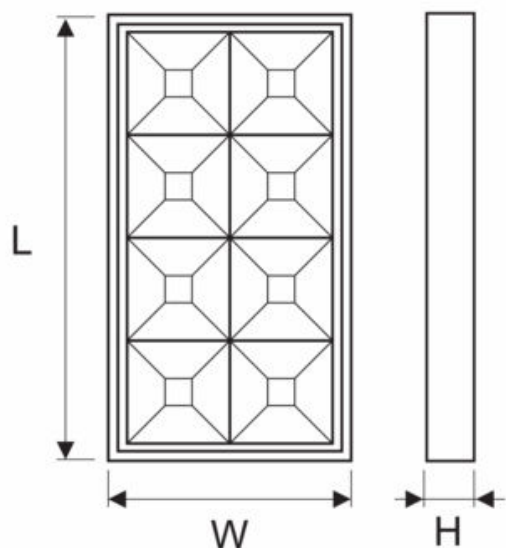

Article Table

DESCRIPTION	Order No.
SALENA LED 29W 3250lm/840 UGR<17 ECG IP20 white	LIG6100137