


Data Sheet for Article: LIG6100146


SELENA LONG LED 1200x300 ED 38W

4200lm/840 UGR<17 IP20 white

Recessed luminaire with matt grid

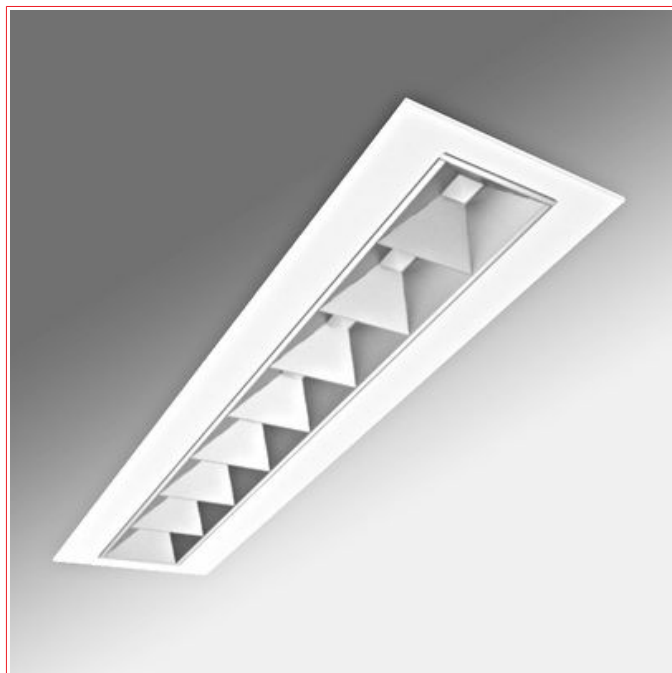

Light distribution curve




Technical Data

Net length (mm)	1.195,00
Net width (mm)	295,00
Net height (mm)	65,00
Net weight (kg)	3,00
Min. ambient temperature (°C)	0
Max. ambient temperature (°C)	35
Luminaire type	Recessed ceiling luminaire
Mounting	recessed mounting ceiling
Colour	RAL 9003 (white)
Material	sheetsteel

Technical Data - continued

Cover	matt
Manufacturer	01-Schrack-Trinity
Glare factor (UGR)	<17
Controller	ECG
Operating voltage AC (V)	220-240
Lamp holder	LED Platine
Watt (W)	38
System efficiency (lm/W)	111
Light colour	neutral white
Colour temperature (K)	4000
Colour rendering index (Ra)	≥80
Luminous flux (lm)	4200
Service life	50.000h / L80 / B10
Dimmable	no
Protection class	I
IP Rating	IP20
Shock strength	IK04
Illuminant incl.	yes
LxWxH mm	1195x295x65

Dimensioned drawing: SELENA LONG LED 1200x300 ED 38W 4200lm/840 UGR<17 IP20 white

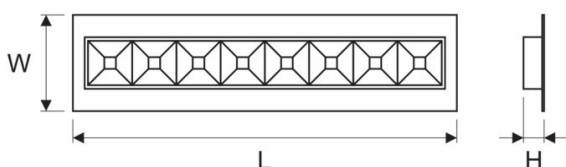

Article Table

DESCRIPTION	Order No.
SELENA LONG LED 1200x300 ED 38W 4200lm/840 UGR<17 IP20 white Recessed luminaire with matt grid	LIG6100146