



Data Sheet for Article: LIG6100152

SELENA OP LED 40W M600 4350lm/840 UGR<19 PLX DALI IP40 white

Recessed mounted luminare with opal cover

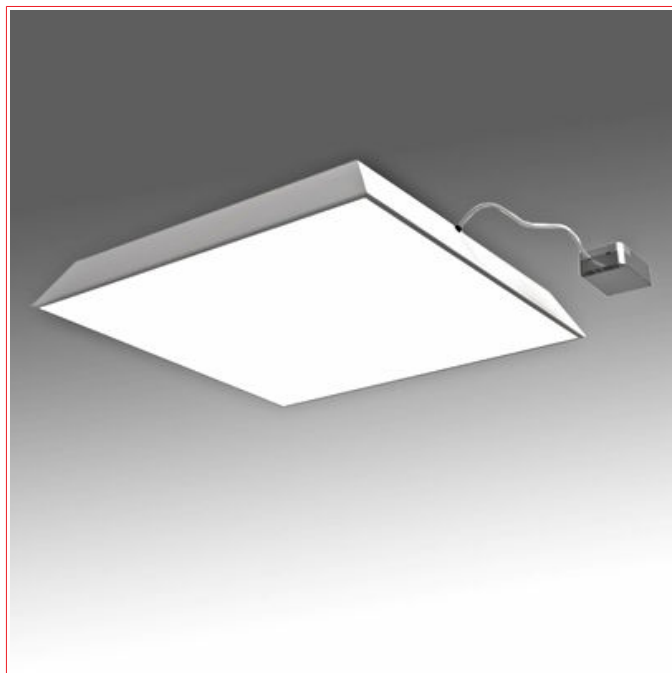

Light distribution curve




Technical Data

Net length (mm)	595,00
Net width (mm)	595,00
Net weight (kg)	4,00
Colour	White
Manufacturer	02-Schrack
Glare factor (UGR)	<19
Controller	EVG DALI
Lamp holder	LED Platine
Watt (W)	40
System efficiency (lm/W)	109

Technical Data - continued

Light colour	neutral white
Colour temperature (K)	4000
Colour rendering index (Ra)	≥80
Luminous flux (lm)	4350
Service life	50.000h / L70 / B50
IP Rating	IP40

Dimensioned drawing: SELENA OP LED 40W M600 4350lm/840 UGR<19 PLX DALI IP40 white

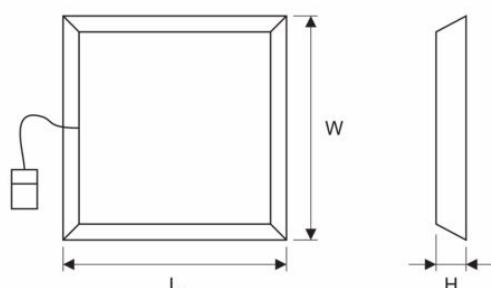

Article Table

DESCRIPTION	Order No.
SELENA OP LED 40W M600 4350lm/840 UGR<19 PLX DALI IP40 white	LIG6100152
Recessed mounted luminare with opal cover	
Optional Accessories	
Mounting frame for plasterboard for SELENA und Lano LED M600	LIG1000605