


Data Sheet for Article: LIG8100003

SIMPLE LINE LED 2012 64W 7100lm/830 ECG IP20 white

Freestanding light strip with connector



Light distribution curve




Technical Data

Net length (mm)	2.014,00
Net width (mm)	40,00
Net height (mm)	60,00
Net weight (kg)	4,00
Max. ambient temperature (°C)	45
Luminaire type	pendulum luminaire surface mounted ceiling luminaire
Mounting	surface mounting pendant
Colour	White

Technical Data - continued

Material	Kunststoff opal Aluminum
Manufacturer	01-Schrack-Trinity
Controller	ECG
Operating voltage AC (V)	220-240
Lamp holder	LED Platine
Watt (W)	64
System efficiency (lm/W)	111
Light colour	warm white
Colour temperature (K)	3000
Colour rendering index (Ra)	≥80
Luminous flux (lm)	7100
Live time	50.000h / L80 / B10
Dimmable	no
Protection class	I
IP Rating	IP20
Shock strength	IK07
Illuminant incl.	yes
LxWxH mm	2014x40x60

Dimensioned drawing: SIMPLE LINE LED 2012 64W 7100lm/830 ECG IP20 white

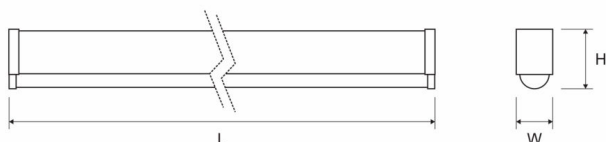

Article Table

DESCRIPTION	Order No.
SIMPLE LINE LED 2012 64W 7100lm/830 ECG IP20 white	LIG8100003
Freestanding light strip with connector	
Optional Accessories	
SIMPLE LINE StarterKIT (3-pole)	LIG3100791
1x power connector, 2x end cap, 1x mounting bracket, 2x cover masking for reflector	
SIMPLE LINE aluminum reflector AS	LIG3000768
SIMPLE LINE double aluminum reflector AS	LIG3000769