


Data Sheet for Article: LIG8100004

SIMPLE LINE LED 2012 64W 7100lm/ 840 ECG IP20 white

Freestanding light strip with connector



Light distribution curve




Technical Data

Net length (mm)	2.014,00
Net width (mm)	40,00
Net height (mm)	60,00
Net weight (kg)	4,00
Min. ambient temperature (°C)	0

Technical Data - continued

Max. ambient temperature (°C)	45
Luminaire type	pendulum luminaire surface mounted ceiling luminaire
Mounting	surface mounting pendant
Colour	White
Material	Kunststoff opal Aluminum
Controller	ECG
Operating voltage AC (V)	220-240
Lamp holder	LED Platine
System efficiency (lm/W)	111
Power (W)	64
Light colour	neutral white
Colour temperature (K)	4000
Colour rendering index (Ra)	≥80
Luminous flux (lm)	7100
Service life	50.000h / L80 / B10
Dimmable	no
Protection class	I
IP Rating	IP20
Shock strength	IK07
Illuminant incl.	yes
LxWxH mm	2014x40x60

Dimensioned drawing: SIMPLE LINE LED 2012 64W 7100lm/840 ECG IP20 white

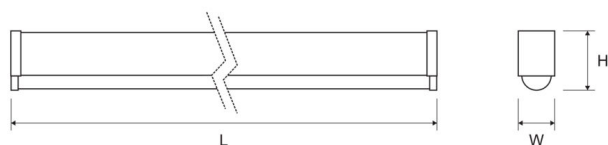

Article Table

DESCRIPTION	Order No.
SIMPLE LINE LED 2012 64W 7100lm/840 ECG IP20 white Freestanding light strip with connector	LIG8100004
Optional Accessories	
SIMPLE LINE StarterKIT (3-pole) 1x power connector, 2x end cap, 1x mounting bracket, 2x cover masking for reflector	LIG3100791