


Data Sheet for Article: LIG8100011

SIMPLE LINE LED 2012 65W 7100lm/830 DALI IP20 white

Freestanding light strip with connector



Light distribution curve




Technical Data

Net length (mm)	2.014,00
Net width (mm)	40,00
Net height (mm)	60,00
Net weight (kg)	4,00
Max. ambient temperature (°C)	45
Luminaire type	pendulum luminaire surface mounted ceiling luminaire
Mounting	surface mounting pendant
Colour	White

Technical Data - continued

Material	Kunststoff opal Aluminum
Manufacturer	01-Schrack-Trinity
Controller	EVG DALI
Operating voltage AC (V)	220-240
Lamp holder	LED Platine
Watt (W)	65
System efficiency (lm/W)	109
Light colour	warm white
Colour temperature (K)	3000
Colour rendering index (Ra)	≥80
Luminous flux (lm)	7100
Live time	50.000h / L80 / B10
Dimmable	DALI
Protection class	I
IP Rating	IP20
Shock strength	IK07
Illuminant incl.	yes
LxWxH mm	2014x40x60

Dimensioned drawing: SIMPLE LINE LED 2012 65W 7100lm/830 DALI IP20 white

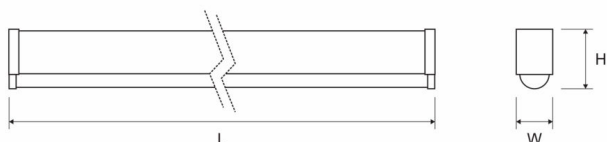

Article Table

DESCRIPTION	Order No.
SIMPLE LINE LED 2012 65W 7100lm/830 DALI IP20 white Freestanding light strip with connector	LIG8100011
Optional Accessories	
SIMPLE LINE StarterKIT (5-pole) 1x power connector, 2x end cap, 1x mounting bracket, 2x cover masking for reflector	LIG3100792
SIMPLE LINE aluminum reflector AS	LIG3000768
SIMPLE LINE double aluminum reflector AS	LIG3000769