

Data Sheet for Article: LIG9100067

PRIMOLUX LED 1535 52W 7750lm/840 opal DALI IP44 white




Technical Data

Net length (mm)	1.535,00
Net width (mm)	95,00
Net height (mm)	72,00
Net weight (kg)	3,10
Min. ambient temperature (°C)	0
Max. ambient temperature (°C)	30
Luminaire type	surface mounted ceiling luminaire
Mounting	surface mounting ceiling surface mounting wall
Colour	White
Material	PMMA opal sheetsteel
Controller	EVG DALI
Operating voltage AC (V)	220-240
Lamp holder	LED Platine

Technical Data - continued

System efficiency (lm/W)	138
Power (W)	52
Light colour	neutral white
Colour temperature (K)	4000
Colour rendering index (Ra)	≥80
Luminous flux (lm)	7750
Service life	60.000h / L80 / B10
Dimmable	DALI yes
Protection class	I
IP Rating	IP44
Shock strength	IK05
Illuminant incl.	yes
Numbers of luminars per MCB B10	13
Numbers of luminars per MCB B16	24

Dimensioned drawing: PRIMOLUX LED 1535 52W 7750lm/840 opal DALI IP44 white

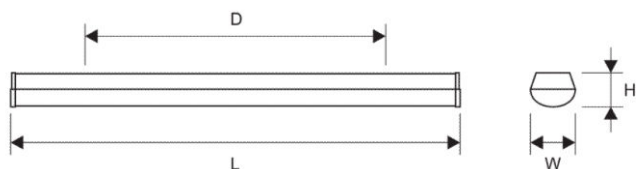

Article Table

DESCRIPTION	Order No.
PRIMOLUX LED 1535 52W 7750lm/840 opal DALI IP44 white	LIG9100067
Optional Accessories	
Flush-mounted Dimmer inbox for Dali Ballasts or Drivers For push button control	EHDALIDIM