


Data Sheet for Article: LIGL052061

RUBINO LED 53W 6500lm/757 IP66 O7 grey

Street lamp with asymmetrical light distribution



Light distribution curve




Technical Data

Net length (mm)	550,00
Net width (mm)	250,00
Net height (mm)	100,00
Net weight (kg)	6,80
Min. ambient temperature (°C)	-40
Max. ambient temperature (°C)	55
Surge protection (kV)	6

Technical Data - continued

Colour	Grey
Manufacturer	01-Schrack-Trinity
Controller	ECG
Lamp holder	LED Platine
System efficiency (lm/W)	111
Power (W)	80
Light colour	cool white
Colour temperature (K)	5700
Colour rendering index (Ra)	≥70
Luminous flux (lm)	10200
Service life	100.000h / L80 / B10
IP Rating	IP66
Pole-top (mm)	60
LxWxH mm	550x250x100

Dimensioned drawing: RUBINO LED 53W 6500lm/757 IP66 O7 grey

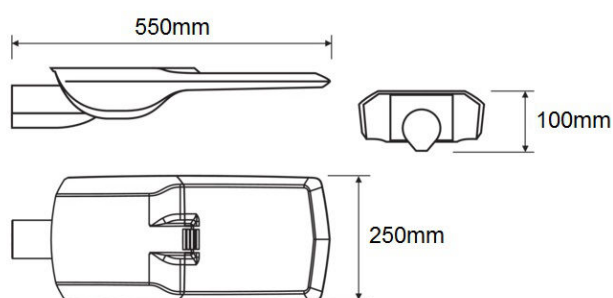

Article Table

DESCRIPTION	Order No.
RUBINO LED 53W 6500lm/757 IP66 O7 grey	LIGL052061
Street lamp with asymmetrical light distribution	
Optional Accessories	
RUBINO LED adapter 60 to 76 mm, grey	LIG1517817
RUBINO LED wall bracket 60 mm, grey	LIG1517818