

Data Sheet for Article: LIGL082051

# TRAFFIK R LED 69W 8500lm/730 IP66 O32

grey

Streetlight




## Technical Data

|                               |             |
|-------------------------------|-------------|
| Net length (mm)               | 615,00      |
| Net width (mm)                | 230,00      |
| Net height (mm)               | 80,00       |
| Net weight (kg)               | 4,10        |
| Min. ambient temperature (°C) | -40         |
| Max. ambient temperature (°C) | 50          |
| Surge protection (kV)         | 10          |
| Colour                        | Grey        |
| Controller                    | ECG         |
| Lamp holder                   | LED Platine |
| System efficiency (lm/W)      | 123         |
| Power (W)                     | 69          |
| Light colour                  | warm white  |
| Colour temperature (K)        | 3000        |

## Technical Data - continued

|                                 |            |
|---------------------------------|------------|
| Colour rendering index (Ra)     | ≥70        |
| Luminous flux (lm)              | 8500       |
| Service life                    | 100.000h   |
| Dimmable                        | no         |
| IP Rating                       | IP66       |
| Illuminant incl.                | yes        |
| Pole-top (mm)                   | 48<br>60   |
| LxWxH mm                        | 615x230x80 |
| Numbers of luminars per MCB B10 | 8          |
| Numbers of luminars per MCB B16 | 12         |
| Numbers of luminars per MCB B25 | 20         |

## Dimensioned drawing: TRAFFIK R LED 69W 8500lm/730 IP66 O32 grey

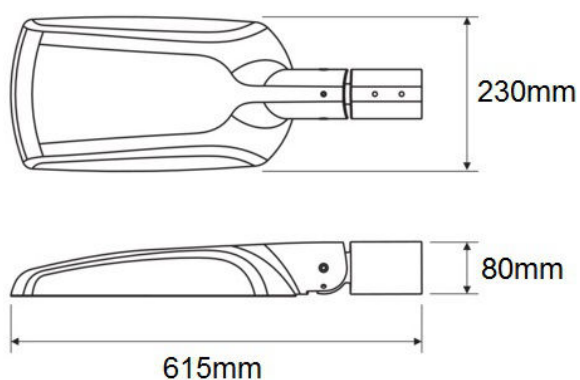

| DESCRIPTION                                               | Order No.  |
|-----------------------------------------------------------|------------|
| TRAFFIK R LED 69W 8500lm/730 IP66 O32 grey<br>Streetlight | LIGL082051 |