



Data Sheet for Article: LIGP152131

PARC LED 42W 3850lm 830, rotationally symmetric, IP66 grafit

Street, and park light, mast top 60mm



Light distribution curve




Technical Data

Luminaire type	street light
Mounting	mast mounting
Colour	Grafit
Material	Plastic
Cover	Clear
Emission angle (°)	360
Controller	ECG
Operating voltage AC (V)	220-240
Light source	LED
Lamp holder	LED Platine

Technical Data - continued

Watt (W)	42
Light colour	warm white
Colour temperature (K)	3000
Colour rendering index (Ra)	>80
Luminous flux (lm)	3850
Live time (h)	100.000 / L80 / B10
Dimmable	no
Protection class	II
IP Rating	IP66
Shock strength	IK09
Pole-top (mm)	60/76
Wind Exposed (m²)	0,17
ØxH mm	570x560

Dimensioned drawing: PARC LED 42W 3850lm 830, rotationally symmetric, IP66 grafit

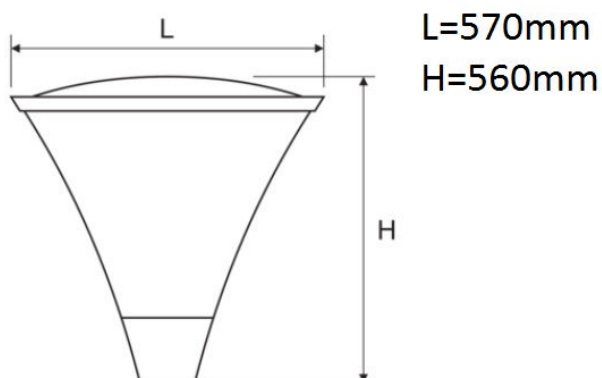

Article Table

DESCRIPTION	Order No.
PARC LED 42W 3850lm 830, rotationally symmetric, IP66 grafit	LIGP152131
Street, and park light, mast top 60mm	