


Data Sheet for Article: LIGU262101

RUBINI LED 20W 2350lm 730, asymmetric, IP66, grey

Street light, mast top 60mm



Light distribution curve




Technical Data

Net length (mm)	407,00
Net width (mm)	110,00
Net height (mm)	120,00
Net weight (kg)	2,90
Min. ambient temperature (°C)	-40

Technical Data - continued

Max. ambient temperature (°C)	55
Luminaire type	street light
Surge protection (kV)	6
Mounting	mast mounting
Colour	Grey
Material	Aluminum
Cover	Clear
Manufacturer	01-Schrack-Trinity
Controller	ECG
Operating voltage AC (V)	220-240
Light source	LED
Lamp holder	LED Platine
Power (W)	20
Light colour	warm white
Colour temperature (K)	3000
Colour rendering index (Ra)	≥70
Luminous flux (lm)	2400
Service life	100.000h / L80 / B10
Dimmable	no
Protection class	II
IP Rating	IP66
Pole-top (mm)	60
Wind Exposed (m ²)	0,029
LxWxH mm	407x110x120

Dimensioned drawing: RUBINI LED 20W 2350lm 730, asymmetric, IP66, grey

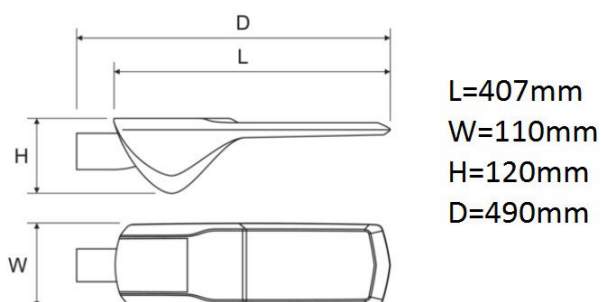

Article Table

DESCRIPTION	Order No.
RUBINI LED 20W 2350lm 730, asymmetric, IP66, grey Street light, mast top 60mm	LIGU262101
Optional Accessories	
RUBINO LED adapter 60 to 76 mm, grey	LIG1517817
RUBINO LED wall bracket 60 mm, grey	LIG1517818