





Data Sheet for Article: LIHB21000-

Arktur Round II LED 157W, 21000lm, 4000K, 120°, DALI

High bay




Technical Data

Net height (mm)	114,00
Net diameter (mm)	380,00
Net weight (kg)	6,00
Min. ambient temperature (°C)	-20
Max. ambient temperature (°C)	50
Luminaire type	high-bay luminaire pendulum luminaire surface mounted ceiling luminaire
Mounting	surface mounting ceiling pendant
Watt (W)	157
Colour	RAL 9006 (grey)
Material	Aluminum Polycarbonate

Technical Data - continued

Manufacturer	01-Schrack-Trinity
Beam angle (°)	120
Controller	LED driver
Operating voltage AC (V)	230
Lamp holder	LED Platine
System efficiency (lm/W)	135
Power (W)	157
Light colour	neutral white
Colour temperature (K)	4000
Colour rendering index (Ra)	≥80
Luminous flux (lm)	21000
Number of lamps	1
Service life	60.000h / L80 / B10
Dimmable	DALI
Protection class	I
IP Rating	IP65
Shock strength	IK10
Illuminant incl.	yes
ØxH mm	380x114

Dimensioned drawing: Arktur Round II LED 157W, 21000lm, 4000K, 120°, DALI

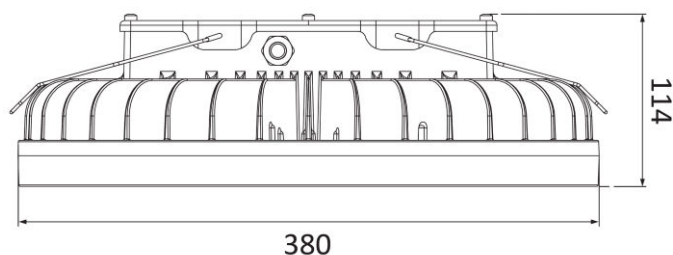

Article Table

DESCRIPTION	Order No.
Arktur Round II LED 157W, 21000lm, 4000K, 120°, DALI	LIHB21000
High bay	
Optional Accessories	
Arktur Round mounting bracket for ceiling mounting	LIHBM380
high bay lighting	