



Data Sheet for Article: LIHGWA17--

Mika LED Wall Up 12,5W 800lm 3000K IP54 anthracite

LED Wall luminaires for outdoor




Light distribution curve





Technical Data

Net length (mm)	139,00
Net width (mm)	116,00
Net height (mm)	160,00
Net weight (kg)	0,83
Luminaire type	wall luminaire
Colour	RAL 7016 (anthracite)
Material	Aluminum PMMA
Beam angle (°)	110
Operating voltage AC (V)	220-240
Temperature range - Operation (°C)	-20 to +40
Lamp holder	LED Platine
System efficiency (lm/W)	64
Power (W)	12,50
Light colour	warm white
Colour temperature (K)	3000
Colour rendering index (Ra)	≥80
Luminous flux (lm)	800
Service life	25.000h
Dimmable	no
Protection class	I
IP Rating	IP54
Shock strength	IK07
Illuminant incl.	yes
LxWxH mm	139x116x160
Numbers of luminars per MCB B10	28
Numbers of luminars per MCB B13	37
Numbers of luminars per MCB B16	46
Numbers of luminars per MCB C10	43
Numbers of luminars per MCB C16	69

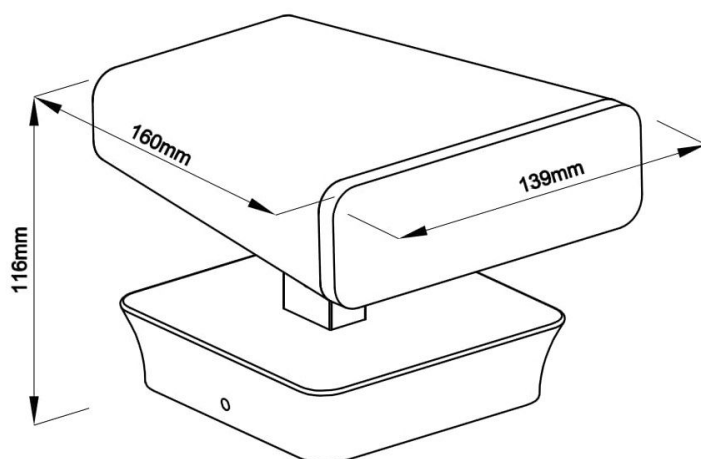LIHGWA17

DESCRIPTION	Order No.
Mika LED Wall Up 12,5W 800lm 3000K IP54 anthracite LED Wall luminaires for outdoor	LIHGWA17