



Data Sheet for Article: LIHGWA24--

Evo LED Round Up 8W 400lm 3000K IP54 anthracite

LED Wall luminaires for outdoor



Light distribution curve






Technical Data

Net length (mm)	94,00
Net width (mm)	65,00
Net height (mm)	145,00
Net diameter (mm)	65,00
Net weight (kg)	0,67
Luminaire type	wall luminaire
Colour	RAL 7016 (anthracite)
Material	Aluminum PMMA
Beam angle (°)	110
Operating voltage AC (V)	220-240
Temperature range - Operation (°C)	-20 to +40
Lamp holder	LED Platine
System efficiency (lm/W)	50
Power (W)	8
Light colour	warm white
Colour temperature (K)	3000
Colour rendering index (Ra)	≥80
Luminous flux (lm)	400
Service life	25.000h
Dimmable	no
Protection class	I
IP Rating	IP54
Shock strength	IK07
Illuminant incl.	yes
ØxH mm	65x145
LxWxH mm	94x65x145
Diameter (mm)	65
Numbers of luminars per MCB B10	15
Numbers of luminars per MCB B13	19
Numbers of luminars per MCB B16	24
Numbers of luminars per MCB C10	22
Numbers of luminars per MCB C16	36

LIHWA24

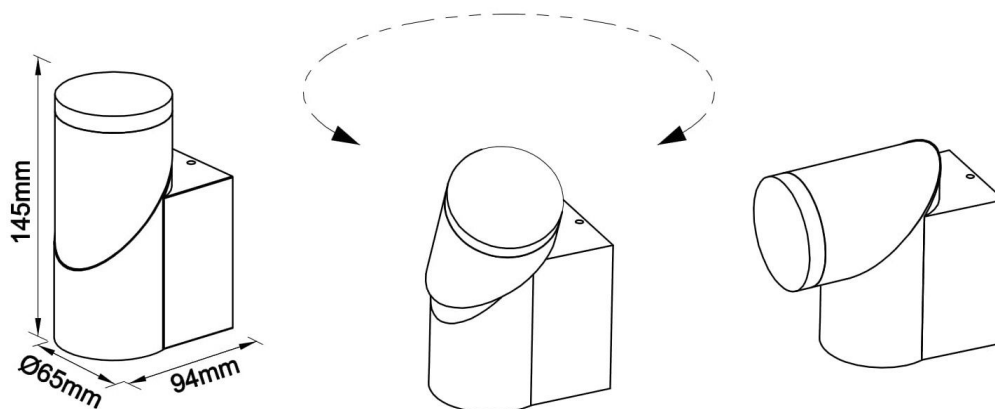

DESCRIPTION	Order No.
Evo LED Round Up 8W 400lm 3000K IP54 anthracite LED Wall luminaires for outdoor	LIHWA24