


Data Sheet for Article: LIIM0014--

Piko LED 6,5W 550lm 3000K 230V 40° white



Light distribution curve




Technical Data

Net height (mm)	43,80
Net diameter (mm)	85,00
Net weight (kg)	0,09
Min. ambient temperature (°C)	-20
Max. ambient temperature (°C)	40
Cut-out size (mm)	Ø 68-75
Luminaire type	Recessed ceiling luminaire
Mounting	recessed mounting ceiling

Technical Data - continued

Colour	White
Material	PC
Cover	opal
Beam angle (°)	40
Controller	LED driver
Operating voltage AC (V)	220-240
Lamp holder	LED Platine
System efficiency (lm/W)	85
Power (W)	6,5
Light colour	warm white
Colour temperature (K)	3000
Colour rendering index (Ra)	≥80
Colour stability MacAdam (sdcm)	<6
Luminous flux (lm)	550
Service life	45.000h / L70 / B50
Dimmable	no
Protection class	II
IP Rating	IP20
Shock strength	IK03
Illuminant incl.	yes
Cut-out size mm	Ø 68-75
Diameter (mm)	85

LIIM0014

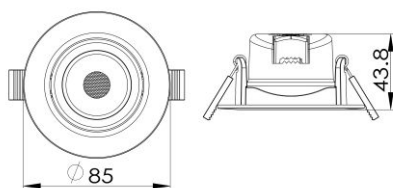

DESCRIPTION	Order No.
Piko LED 6,5W 550lm 3000K 230V 40° white	LIIM0014