


Data Sheet for Article: LIIM0014-B

PIKO LED 6.5W 3000K 230V 40° 560lm white

Recessed Spotlight including connection box



Light distribution curve




Technical Data

Net height (mm)	44,00
Net diameter (mm)	85,00
Net weight (kg)	0,10
Min. ambient temperature (°C)	-20
Max. ambient temperature (°C)	40
Cut-out size (mm)	Ø 68-75
Luminaire type	Recessed ceiling luminaire

Technical Data - continued

Mounting	recessed mounting ceiling
Colour	White
Material	PC
Cover	opal
Beam angle (°)	40
Controller	LED driver
Operating voltage AC (V)	220-240
Lamp holder	LED Platine
System efficiency (lm/W)	85
Power (W)	6,50
Light colour	warm white
Colour temperature (K)	3000
Colour rendering index (Ra)	≥80
Colour stability MacAdam (sdcm)	<6
Luminous flux (lm)	560
Service life	45.000h / L70 / B50
Dimmable	no
Protection class	II
IP Rating	IP20
Energy efficiency class	F
Shock strength	IK03
Illuminant incl.	yes
Cut-out size mm	Ø 68-75
Diameter (mm)	85
Numbers of luminars per MCB B10	110
Numbers of luminars per MCB B13	140
Numbers of luminars per MCB B16	170
Numbers of luminars per MCB B20	220
Numbers of luminars per MCB B25	270
Numbers of luminars per MCB C10	110
Numbers of luminars per MCB C13	140
Numbers of luminars per MCB C16	170
Numbers of luminars per MCB C20	220
Numbers of luminars per MCB C25	270

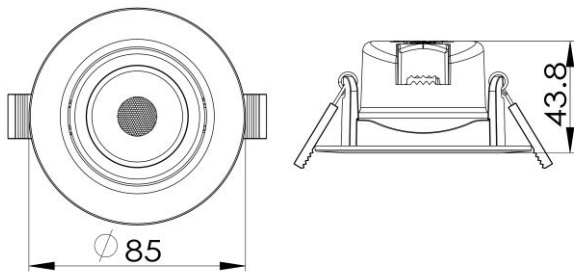Dimensioned drawing: PIKO LED 6.5W 3000K 230V 40° 560lm white

DESCRIPTION	Order No.
PIKO LED 6.5W 3000K 230V 40° 560lm white Recessed Spotlight including connection box	LIIM0014-B