


Data Sheet for Article: LIIM0019--

Segon Eco 14W Tri-white 3K, 4K, 6.5K, 230V, 90°, ECG, white

3000K=1200lm, 4000K=1260lm, 6500K=1260lm, IP20/44



Light distribution curve




Technical Data

Net height (mm)	65,80
Net diameter (mm)	145,00
Net weight (kg)	0,28
Min. ambient temperature (°C)	-20
Max. ambient temperature (°C)	40

Technical Data - continued

Cut-out size (mm)	Ø 120-130
Luminaire type	Recessed ceiling luminaire
Mounting	recessed mounting ceiling
Colour	White
Material	polyamide Polycarbonate
Cover	opal
Beam angle (°)	90
Glare factor (UGR)	<22
Controller	LED driver
Operating voltage AC (V)	220-240
Lamp holder	LED Platine
Power (W)	14
Light colour	neutral white warm white cool white
Colour temperature (K)	3000, 4000, 6500
Colour rendering index (Ra)	≥80
Colour stability MacAdam (sdcm)	<6
Luminous flux (lm)	3000K=1200lm, 4000K=1260lm, 6500K=1260lm
Service life	45.000h / L70 / B50
Dimmable	no
Protection class	II
IP Rating	IP20/44
Shock strength	IK03
Illuminant incl.	yes
Diameter (mm)	145
ØxH mm	145x66
Cut-out size mm	Ø 120-130

Dimensioned drawing: Segon Eco 14W Tri-white 3K, 4K, 6.5K, 230V, 90°, ECG, white

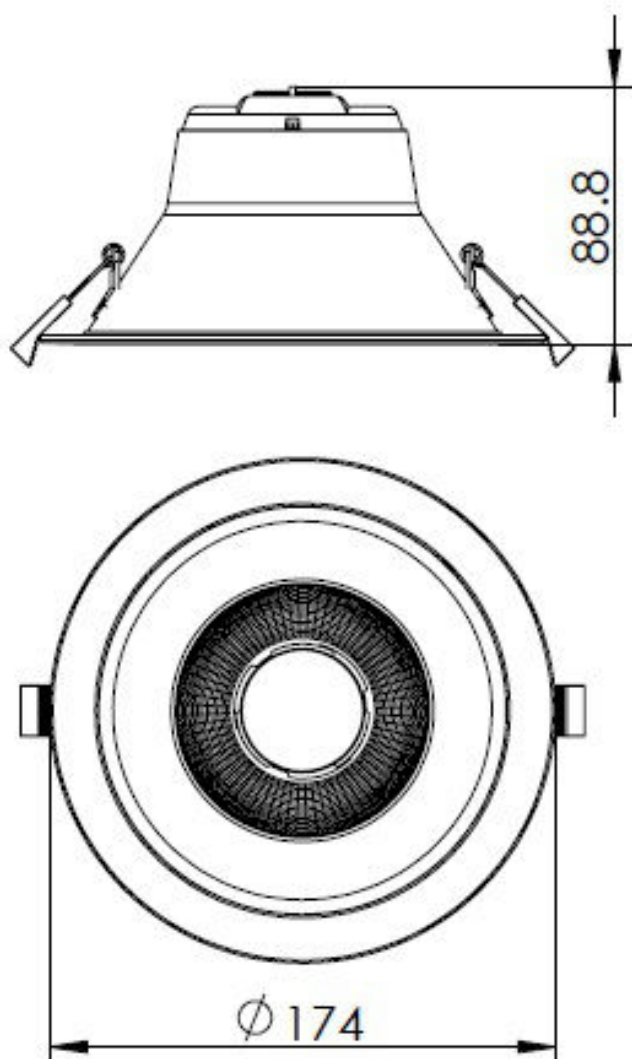

DESCRIPTION	Order No.
Segon Eco 14W Tri-white 3K, 4K, 6.5K, 230V, 90°, ECG, white 3000K=1200lm, 4000K=1260lm, 6500K=1260lm, IP20/44	LIIM0019