


Data Sheet for Article: LILE0003--

Elegance Round II 15W 1500lm 4000K IP44 white

Wall, ceiling luminaire



Light distribution curve





Technical Data

Net height (mm)	50,00
Net diameter (mm)	220,00
Net weight (kg)	0,61
Min. ambient temperature (°C)	-10
Max. ambient temperature (°C)	40

Technical Data - continued

Luminaire type	wall luminaires surface mounted ceiling luminaire
Mounting	surface mounting ceiling surface mounting wall
Colour	White
Material	Polycarbonate
Beam angle (°)	110
Controller	LED driver
Operating voltage AC (V)	220-240
Lamp holder	LED Platine
System efficiency (lm/W)	100
Power (W)	15
Light colour	neutral white
Colour temperature (K)	4000
Colour rendering index (Ra)	≥80
Luminous flux (lm)	1500
Service life	30.000h / L70 / B50
Dimmable	no
Protection class	II
IP Rating	IP44
Shock strength	IK10
Illuminant incl.	yes
Diameter (mm)	220
ØxH mm	220x50
Numbers of luminars per MCB B10	142
Numbers of luminars per MCB B13	184
Numbers of luminars per MCB B16	227
Numbers of luminars per MCB C10	142
Numbers of luminars per MCB C13	184
Numbers of luminars per MCB C16	227

Dimensioned drawing: Elegance Round II 15W 1500lm 4000K IP44 white

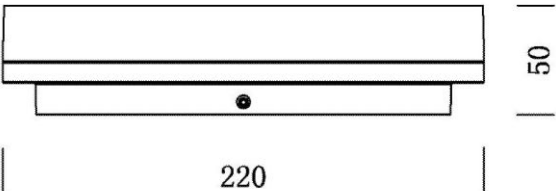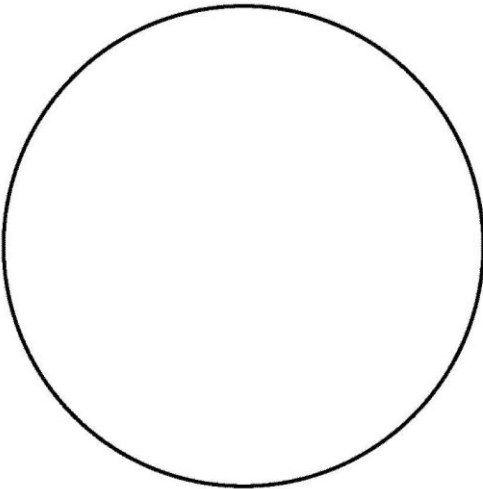

DESCRIPTION	Order No.
Elegance Round II 15W 1500lm 4000K IP44 white Wall, ceiling luminaire	LILE0003