


Data Sheet for Article: LILE0016--

Elegance Round III 27W 2800lm 4000K Triac Dim IP20 silver

Wall, ceiling luminaire



Light distribution curve




Technical Data

Net height (mm)	44,00
Net diameter (mm)	270,00
Net weight (kg)	1,00
Min. ambient temperature (°C)	-10
Max. ambient temperature (°C)	40
Luminaire type	wall luminaires surface mounted ceiling luminaire

Technical Data - continued

Mounting	surface mounting ceiling surface mounting wall
Colour	Silver
Material	Aluminum Polycarbonate
Manufacturer	01-Schrack-Trinity
Beam angle (°)	110
Controller	LED driver
Operating voltage AC (V)	220-240
Lamp holder	LED Platine
Watt (W)	27
System efficiency (lm/W)	103
Light colour	neutral white
Colour temperature (K)	4000
Colour rendering index (Ra)	≥80
Luminous flux (lm)	2800
Service life	30.000h / L70 / B50
Dimmable	TRIAC
Protection class	II
IP Rating	IP20
Energy efficiency class	A++ A+ A
Shock strength	IK10
Illuminant incl.	yes
Diameter (mm)	270
ØxH mm	270x44
Numbers of luminars per MCB B10	17
Numbers of luminars per MCB B13	22
Numbers of luminars per MCB B16	28
Numbers of luminars per MCB C10	27
Numbers of luminars per MCB C13	35
Numbers of luminars per MCB C16	45

Dimensioned drawing: Elegance Round III 27W 2800lm 4000K Triac Dim IP20 silver

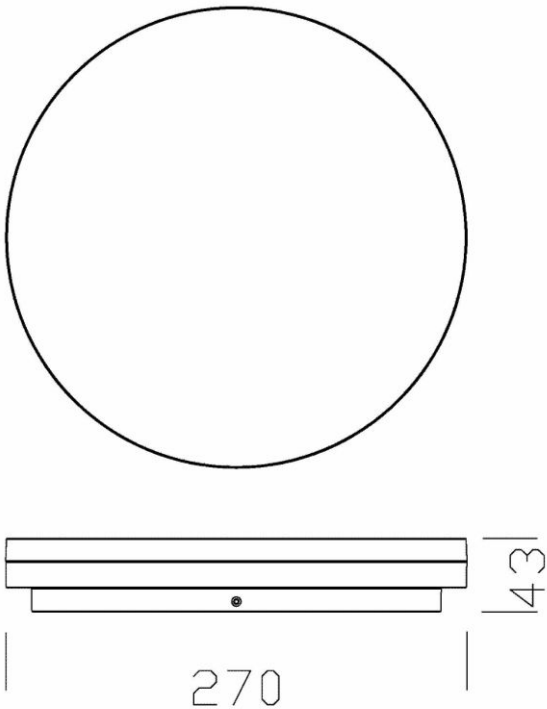

Article Table

DESCRIPTION	Order No.
Elegance Round III 27W 2800lm 4000K Triac Dim IP20 silver Wall, ceiling luminaire	LILE0016