


Data Sheet for Article: LILE0027--

Elegance Square II 15W 1500lm 4000K IP44 white

Wall, ceiling luminaire



Light distribution curve




Technical Data

Net length (mm)	210,00
Net width (mm)	210,00
Net height (mm)	50,00
Net weight (kg)	0,65
Min. ambient temperature (°C)	-10
Max. ambient temperature (°C)	40
Luminaire type	wall luminaires surface mounted ceiling luminaire

Technical Data - continued

Mounting	surface mounting ceiling surface mounting wall
Colour	White
Material	Polycarbonate
Manufacturer	01-Schrack-Trinity
Beam angle (°)	110
Controller	LED driver
Operating voltage AC (V)	220-240
Lamp holder	LED Platine
Watt (W)	15
System efficiency (lm/W)	100
Light colour	neutral white
Colour temperature (K)	4000
Colour rendering index (Ra)	≥80
Luminous flux (lm)	1500
Live time	30.000h / L70 / B50
Dimmable	no
Protection class	II
IP Rating	IP44
Energy efficiency class	A++ A+ A
Shock strength	IK10
Illuminant incl.	yes
LxWxH mm	210x210x50

Dimensioned drawing: Elegance Square II 15W 1500lm 4000K IP44 white

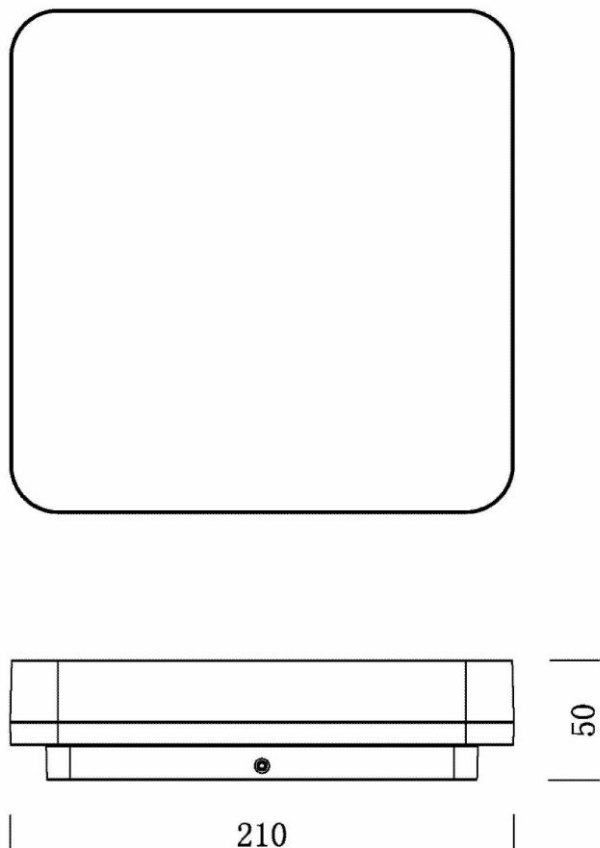

Article Table

DESCRIPTION	Order No.
Elegance Square II 15W 1500lm 4000K IP44 white Wall, ceiling luminaire	LILE0027