


Data Sheet for Article: LILE0035--

Elegance Square III 27W 2800lm 4000K IP20 white

Wall, ceiling luminaire



Light distribution curve




Technical Data

Net length (mm)	260,00
Net width (mm)	260,00
Net height (mm)	44,00
Net weight (kg)	1,31
Min. ambient temperature (°C)	-10

Technical Data - continued

Max. ambient temperature (°C)	40
Luminaire type	wall luminaires surface mounted ceiling luminaire
Mounting	surface mounting ceiling surface mounting wall
Colour	White
Material	Aluminum Polycarbonate
Beam angle (°)	110
Controller	LED driver
Operating voltage AC (V)	220-240
Lamp holder	LED Platine
System efficiency (lm/W)	103
Power (W)	27
Light colour	neutral white
Colour temperature (K)	4000
Colour rendering index (Ra)	≥80
Luminous flux (lm)	2800
Service life	30.000h / L70 / B50
Dimmable	no
Protection class	II
IP Rating	IP20
Shock strength	IK10
Illuminant incl.	yes
LxWxH mm	260x260x44
Numbers of luminars per MCB B10	27
Numbers of luminars per MCB B13	35
Numbers of luminars per MCB B16	45
Numbers of luminars per MCB C10	43
Numbers of luminars per MCB C13	55
Numbers of luminars per MCB C16	72

Dimensioned drawing: Elegance Square III 27W 2800lm 4000K IP20 white

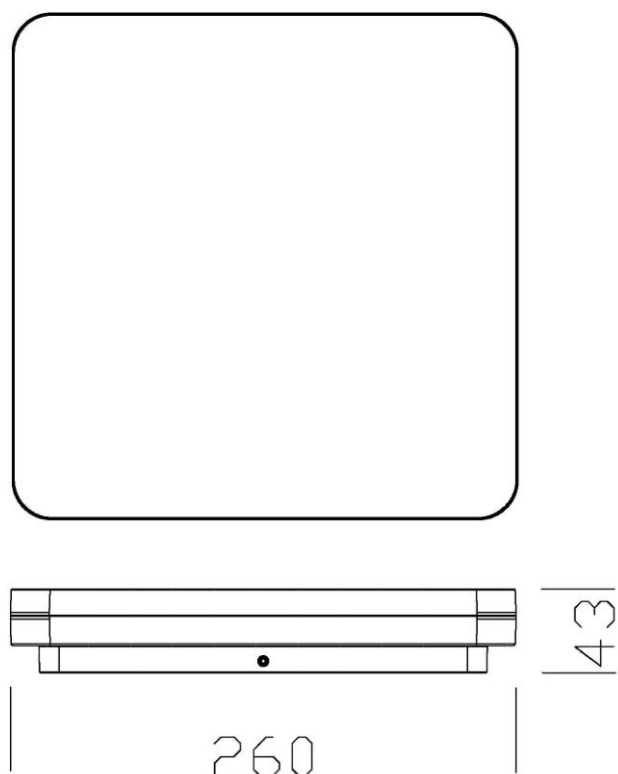

DESCRIPTION	Order No.
Elegance Square III 27W 2800lm 4000K IP20 white Wall, ceiling luminaire	LILE0035