

Data Sheet for Article: LILE0043--


Elegance Square III 27W 2800lm 4000K

Sensor IP20 white

Wall, ceiling luminaire



Light distribution curve




Technical Data

Net length (mm)	260,00
Net width (mm)	260,00
Net height (mm)	44,00
Net weight (kg)	1,37
Min. ambient temperature (°C)	-10
Max. ambient temperature (°C)	40
Luminaire type	wall luminaires surface mounted ceiling luminaire

Technical Data - continued

Mounting	surface mounting ceiling surface mounting wall
Colour	White
Material	Aluminum Polycarbonate
Manufacturer	01-Schrack-Trinity
Beam angle (°)	110
Controller	LED driver
Operating voltage AC (V)	220-240
Lamp holder	LED Platine
Watt (W)	27
System efficiency (lm/W)	103
Light colour	neutral white
Colour temperature (K)	4000
Colour rendering index (Ra)	≥80
Luminous flux (lm)	2800
Service life	30.000h / L70 / B50
Dimmable	no
Protection class	II
IP Rating	IP20
Energy efficiency class	A++ A+ A
Shock strength	IK10
Illuminant incl.	yes
Detection beam (m)	10
Detection angle (°)	360
Turn off delay	5 sec-24 h
Level of brightness	0-500 lux
LxWxH mm	260x260x44
Numbers of luminars per MCB B10	76
Numbers of luminars per MCB B13	98
Numbers of luminars per MCB B16	121
Numbers of luminars per MCB C10	76
Numbers of luminars per MCB C13	98
Numbers of luminars per MCB C16	121

Dimensioned drawing: Elegance Square III 27W 2800lm 4000K Sensor IP20 white

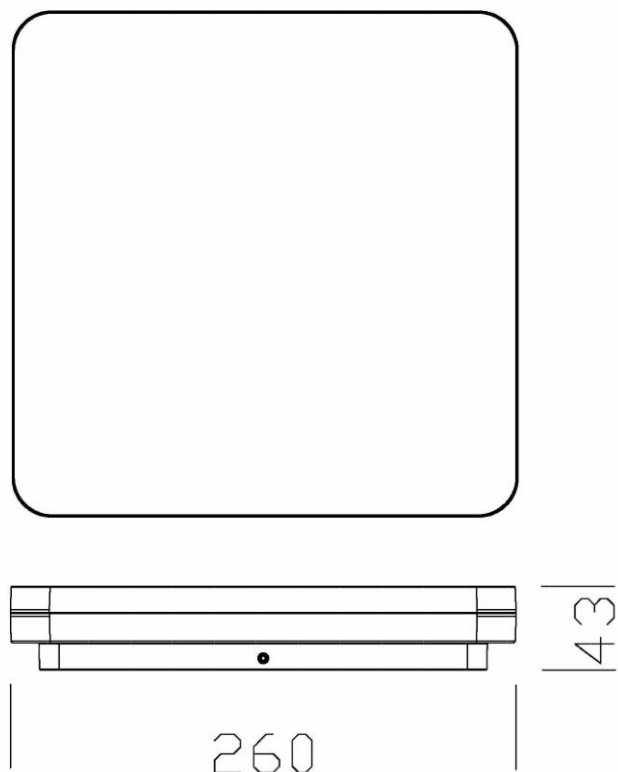

Article Table

DESCRIPTION	Order No.
Elegance Square III 27W 2800lm 4000K Sensor IP20 white Wall, ceiling luminaire	LILE0043