


Data Sheet for Article: LILE0048--

Elegance Square IV 37W 3700lm 4000K Triac Dim IP20 silver

Wall, ceiling luminaire



Light distribution curve





Technical Data

Net length (mm)	400,00
Net width (mm)	400,00
Net height (mm)	63,00
Net weight (kg)	2,49
Min. ambient temperature (°C)	-10
Max. ambient temperature (°C)	40
Luminaire type	wall luminaires surface mounted ceiling luminaire

Technical Data - continued

Mounting	surface mounting ceiling surface mounting wall
Colour	Silver
Material	Aluminum Polycarbonate
Manufacturer	01-Schrack-Trinity
Beam angle (°)	110
Controller	LED driver
Operating voltage AC (V)	220-240
Lamp holder	LED Platine
Watt (W)	37
System efficiency (lm/W)	100
Light colour	neutral white
Colour temperature (K)	4000
Colour rendering index (Ra)	≥80
Luminous flux (lm)	3700
Service life	30.000h / L70 / B50
Dimmable	TRIAC
Protection class	II
IP Rating	IP20
Energy efficiency class	A++ A+ A
Shock strength	IK10
Illuminant incl.	yes
LxWxH mm	400x400x63
Numbers of luminars per MCB B10	18
Numbers of luminars per MCB B13	23
Numbers of luminars per MCB B16	30
Numbers of luminars per MCB C10	28
Numbers of luminars per MCB C13	36
Numbers of luminars per MCB C16	48

Dimensioned drawing: Elegance Square IV 37W 3700lm 4000K Triac Dim IP20 silver

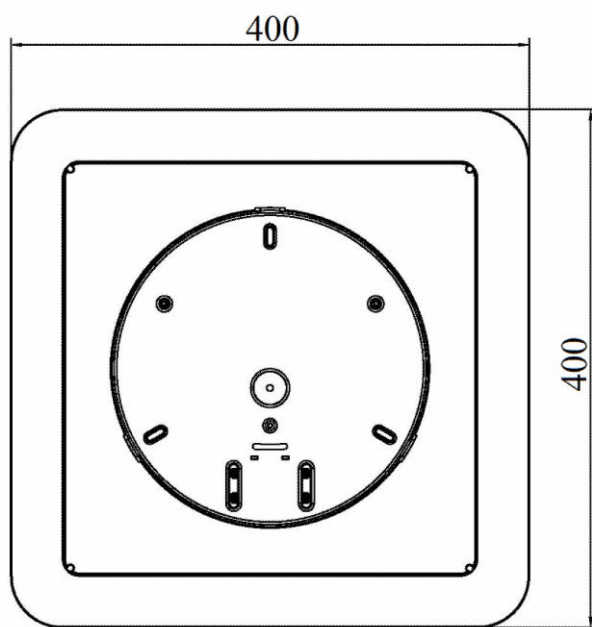

Article Table

DESCRIPTION	Order No.
Elegance Square IV 37W 3700lm 4000K Triac Dim IP20 silver Wall, ceiling luminaire	LILE0048