


Data Sheet for Article: LILE0052--

Elegance Long LED 37W 3700lm 4000K Triac Dim IP44 silver

Ceiling luminaire



Light distribution curve




Technical Data

Net length (mm)	1.200,00
Net width (mm)	130,00
Net height (mm)	55,00
Net weight (kg)	2,40
Min. ambient temperature (°C)	-10

Technical Data - continued

Max. ambient temperature (°C)	40
Luminaire type	wall luminaires surface mounted ceiling luminaire
Mounting	surface mounting ceiling surface mounting wall
Colour	Silver
Material	Aluminum Polycarbonate
Beam angle (°)	110
Controller	LED driver
Operating voltage AC (V)	220-240
Lamp holder	LED Platine
System efficiency (lm/W)	100
Power (W)	37
Light colour	neutral white
Colour temperature (K)	4000
Colour rendering index (Ra)	≥80
Luminous flux (lm)	3700
Service life	30.000h / L70 / B50
Dimmable	TRIAC
Protection class	II
IP Rating	IP20/44
Shock strength	IK10
Illuminant incl.	yes
LxWxH mm	1200x130x55
Numbers of luminars per MCB B10	18
Numbers of luminars per MCB B13	23
Numbers of luminars per MCB B16	30
Numbers of luminars per MCB C10	28
Numbers of luminars per MCB C13	36
Numbers of luminars per MCB C16	48

Dimensioned drawing: Elegance Long LED 37W 3700lm 4000K Triac Dim IP44 silver

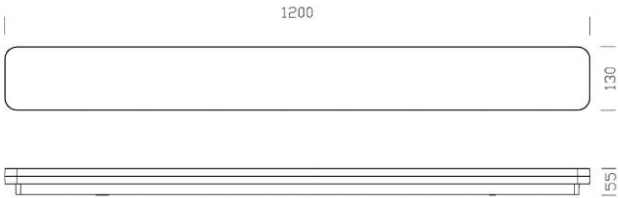

DESCRIPTION	Order No.
Elegance Long LED 37W 3700lm 4000K Triac Dim IP44 silver Ceiling luminaire	LILE0052