


Data Sheet for Article: LILE0056--

Elegance Split 28W 2800lm 3000K Triac Dim IP54 white

Wall, ceiling luminaire



Light distribution curve




Technical Data

Net height (mm)	70,00
Net diameter (mm)	350,00
Net weight (kg)	2,29
Min. ambient temperature (°C)	-10
Max. ambient temperature (°C)	40

Technical Data - continued

Luminaire type	wall luminaires surface mounted ceiling luminaire
Mounting	surface mounting ceiling
Colour	White
Material	Aluminum Polycarbonate
Manufacturer	01-Schrack-Trinity
Beam angle (°)	110
Controller	LED driver
Operating voltage AC (V)	220-240
Lamp holder	LED Platine
System efficiency (lm/W)	100
Power (W)	28
Light colour	warm white
Colour temperature (K)	3000
Colour rendering index (Ra)	≥80
Luminous flux (lm)	2800
Service life	30.000h / L70 / B50
Dimmable	TRIAC
Protection class	II
IP Rating	IP54
Energy efficiency class	A++ A+ A
Shock strength	IK10
Illuminant incl.	yes
Diameter (mm)	350
ØxH mm	350x70
Numbers of luminars per MCB B10	17
Numbers of luminars per MCB B13	22
Numbers of luminars per MCB B16	28
Numbers of luminars per MCB C10	27
Numbers of luminars per MCB C13	35
Numbers of luminars per MCB C16	45

Dimensioned drawing: Elegance Split 28W 2800lm 3000K Triac Dim IP54 white

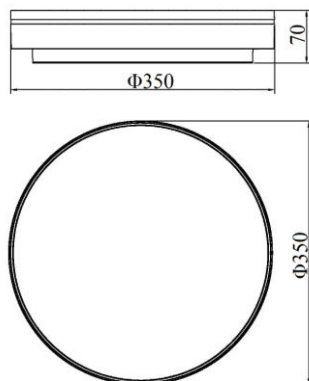

Article Table

DESCRIPTION	Order No.
Elegance Split 28W 2800lm 3000K Triac Dim IP54 white Wall, ceiling luminaire	LILE0056