




Data Sheet for Article: LILE0058--

Elegance Round 2 EVolution 15W/ 10W 3K/4K Dim IP54 white

Wall, ceiling light with adjustable wattage and light colour, lumen 15W = 1700lm / 10W = 1100lm



Light distribution curve

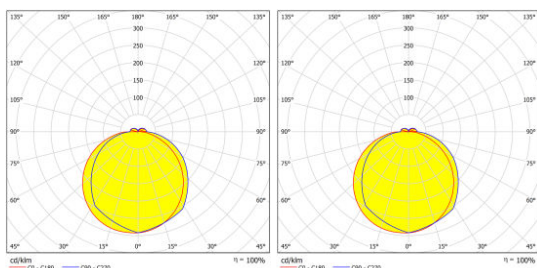


Technical Data

Net height (mm)	53,00
Net diameter (mm)	220,00
Net weight (kg)	0,61
Min. ambient temperature (°C)	-10

Technical Data - continued

Max. ambient temperature (°C)	40
Luminaire type	wall luminaires surface mounted ceiling luminaire
Mounting	surface mounting ceiling surface mounting wall
Colour	White
Material	Polycarbonate
Beam angle (°)	110
Controller	LED driver
Operating voltage AC (V)	220-240
Lamp holder	LED Platine
System efficiency (lm/W)	100
Power (W)	10; 15
Light colour	neutral white warm white
Colour temperature (K)	3000, 4000
Colour rendering index (Ra)	≥80
Luminous flux (lm)	10W = 1100 15W = 1700
Service life	50.000h / L80 / B50 80.000h / L70 / B50
Dimmable	yes TRIAC
Protection class	II
IP Rating	IP54 (Ceiling mounting) IP50 (Wall mounting)
Shock strength	IK10
Illuminant incl.	yes
Diameter (mm)	220
ØxH mm	220x53
Numbers of luminars per MCB B10	142
Numbers of luminars per MCB B16	227
Numbers of luminars per MCB C10	142
Numbers of luminars per MCB C16	227

**Dimensioned drawing: Elegance Round 2 EVOLution 15W/10W 3K/4K Dim
IP54 white**

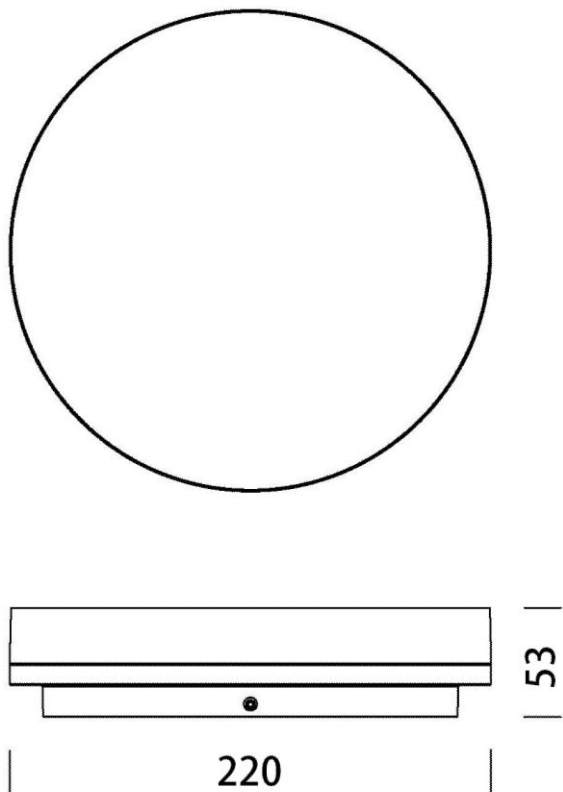

DESCRIPTION	Order No.
Elegance Round 2 EVOLution 15W/10W 3K/4K Dim IP54 white	LILE0058
Wall, ceiling light with adjustable wattage and light colour, lumen 15W = 1700lm / 10W = 1100lm	